

Products
No. 4097



HabiPLAST®

Guides for roller chains
and belts, extruded profiles
and accessories

(in metric dimensions)

Habasit - Solutions in motion



Introduction	3
Industries and applications	4 - 5
Materials overview	6
Materials technical data	7
Standard tolerance grades	8
Materials chemical resistance	9 - 11
Guide profiles	12
Roller chain guides	13 - 21
Round belts guides	22
V-belts guides	23
Flat belts guides	24
Metallic profiles for HabiPLAST® guides	25
Accessories for metallic profiles	26
Extruded profiles for HabasitLINK® and HabaCHAIN®	27 - 48
Machined profiles for chains C3200/C3210	49
Tapes in PE	50
WS 01 Wearstrips kit	51
Corner and straight tracks for HabaCHAIN®	52 - 55
Notes	56
Guides for HabaSYNC® timing belts	57 - 61
Services	62
The Habasit Solution	63

HabiPLAST®

Leader in production and sales of conveyor belts, year by year Habasit has developed a comprehensive knowledge in various sectors of production processes.

To offer a more and more complete service, Habasit created the HabiPLAST® division, specialized in supplying of thermoplastic products for engineering and industrial applications like extruded profiles, machined profiles, sliding guides, wear-strips, plastic parts, ect.

Industries and applications

HabiPLAST® products are used in many industries like bottling, packaging, mechanics, chemistry, pharmaceuticals, ceramics, glass, food, paper, etc. The new HabiPLAST® extruded profiles are the best complement for HabasitLINK® modular belts, HabaCHAIN® and HabaSYNC®.

Production

HabiPLAST® products are machined in our modern plants in Vittorio Veneto and Vigliano Biellese (Italy). The factories are equipped with the most technologically advanced systems and equipments available. CNC machines guarantee a remarkable flexibility and big productive volumes always of high quality. Our stock of standard products ensures deliveries on time. HabiPLAST® division could also realize parts on the basis of customer's drawings.

Competence and experience

Habasit application engineers and technicians are at your disposal to provide professional consulting, superb customer care and excellent support. With more than 50 years of experience and a comprehensive global network, Habasit is able to respond to any request that you may have with the optimal solution tailored to your specific needs.

Unlimited use of HabiPLAST® products

HabiPLAST® products are used in a wide range of industries.

Food

Bakery/Biscuit
Meat
Fish
Poultry
Dairy
Agriculture

Bottling Industry



Materials Handling

Distribution centers
General conveyor systems

Airports

Baggage handling

Automotive

Assembling operations

Chemistry



Paper

Packaging

Packaging machinery



Fitness

Leisure park applications
Winter applications


Food

- Wearstrips and guide profiles
- Customized parts



Bottling industry

- Wearstrips for table top chains
- Guide profile
- Curves for side flexing chains

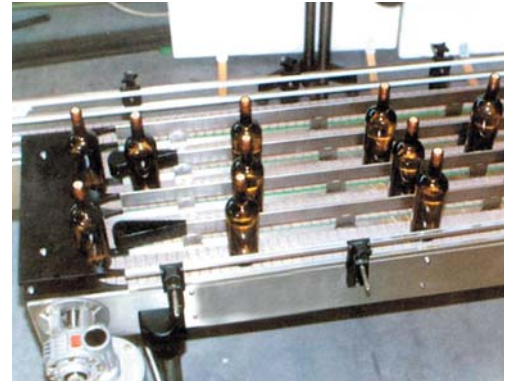


Spiral applications

- Cage bars
- Wearstrips for modular belts



Materials Handling

- Wearstrips
- Side guide profiles

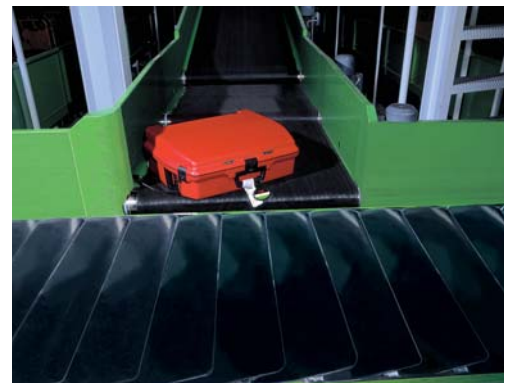

Bottling

- Bottling components
- On drawing parts



Chemistry

- On drawing parts



Habasit standard engineering polymers

Habasit offers a wide range of materials in order to satisfy all customer’s needs.

Acronym	Family	Habasit Denomination
PE	Polyethylene	HabiPLAST®
PA	Polyamide	Habilon
POM	Polyoxymethylene	Habital
PET	Polyethylene Terephthalate	Habipet
PTFE	Polytetrafluorethylene	Habifluor
PVC	Polyvinylchloride	Habivit
PP	Polypropylene	Habipro



HabiPLAST®

HabiPLAST® is a polyethylene with high molecular weight, obtained by a low pressure polymerization process. The medium molecular weight of HabiPLAST® is between 0,3 and 8 millions of g/mol (measured by a viscosimeter). Together with molecular weight also mechanical features increase, such as: impact resistance, tensile strength at high temperature, energy absorption under high stress level, etc.



HabiPLAST® Type	Material properties
UHV	Polyethylene Ultra High Molecular Weight (4.000.000)
UHR	Polyethylene High Molecular Weight (1.000.000)
H/SA	Polyethylene High Medium Molecular Weight (500.000/700.000)
HE/M	Polyethylene Medium Molecular Weight (300.000/500.000)

HabiPLAST® features

- Low coefficient of friction
- Self-lubricating
- Good vibration and noise absorption
- High wear resistance
- High chemical resistance, no corrosion
- No moisture absorption
- High dielectric strength
- High impact and fracture strength

Materials technical data

	Units of measure	PE HabiPLAST®	PA Habilon	POM Habitall	PET Habipet	PTFE Habifluor	PVC Habivit	PP Habipro
Physical data								
Density	g/cm ³	0.93 - 0.95	1.15 - 1.18	1.41	1.39	2.2	1.43	0.92
Water absorption	%	0	5.5 - 9.5	0.85	0.5	0	0.1	0
Mechanical data								
Tensile strength R	N/mm ²	17 - 28	60 - 85	68 - 78	60 - 90	20 - 25	33 - 55	20 - 30
Elongation at break	%	>50	40 - 200	35	15	>50	21 - 25	13
Modulus of elasticity (tensile test)	N/mm ²	700 - 950	1800 - 3100	2100 - 3100	2500 - 2800	700	3000 - 3200	1100 - 1900
Brinell Hardness	-	38 - 45	145 - 165	140 - 170	150 - 170	25 - 30	150 - 170	140
Coefficient of friction on dry steel	-	0.2	0.4 - 0.6	0.34	0.18	0.06	0.25	0.30
Thermal data								
Linear thermal expansion coefficient: Average between 23 and 100 °C	mm/ (m x °C)	0.2	0.12	0.09	0.08	0.01	0.08	0.13
Lower limit of operation temperature	°C	-70	-46	-40	-20	-20	0	5
Upper limit of operation temperature	°C	+65	+100	+110	+110	+260	+60	+105

- The mechanical characteristics are measured at 23°C.

Standard tolerance grades

Nominal Dimension [mm]		(1) IT1	(1) IT2	(1) IT3	(1) IT4	(1) IT5	IT6	IT7	IT8	IT9	IT10	IT11	IT12	IT13	(2) IT14	(2) IT15	(2) IT16	(2) IT17	(2) IT18
From	to	Tolerance																	
		[µm]												[mm]					
–	3	0,8	1,2	2	3	4	6	10	14	25	40	60	0,1	0,14	0,25	0,4	0,6	1	1,4
3	6	1	1,5	2,5	4	5	8	12	18	30	48	75	0,12	0,19	0,3	0,48	0,75	1,2	1,8
6	10	1	1,5	2,5	4	6	9	15	22	36	58	90	0,15	0,22	0,36	0,58	0,9	1,5	2,2
10	18	1,2	2	3	5	8	11	18	27	43	70	110	0,18	0,27	0,43	0,7	1,1	1,8	2,7
18	30	1,5	2,5	4	6	9	13	21	33	52	84	130	0,21	0,33	0,52	0,84	1,3	2,1	3,3
30	50	1,5	2,5	4	7	11	16	25	39	62	100	160	0,25	0,39	0,62	1	1,6	2,5	3,9
50	80	2	3	5	8	13	19	30	46	74	120	190	0,3	0,46	0,74	1,2	1,9	3	4,6
80	120	2,5	4	6	10	15	22	35	54	87	140	220	0,35	0,54	0,87	1,4	2,2	3,5	5,4
120	180	3,5	5	8	12	18	25	40	63	100	160	250	0,4	0,63	1	1,6	2,5	4	6,3
180	250	4,7	7	10	14	20	29	46	72	115	185	290	0,46	0,72	1,15	1,85	2,9	4,6	7,2
250	315	6	8	12	16	23	32	52	81	130	210	320	0,52	0,81	1,3	2,1	3,2	5,2	8,1
315	400	7	9	13	18	25	36	57	89	140	230	360	0,57	0,89	1,4	2,3	3,6	5,7	8,9
400	500	8	10	15	20	27	40	63	97	155	250	400	0,63	0,97	1,55	2,5	4	6,3	9,7
500	630	9	11	16	22	32	44	70	110	175	280	440	0,7	1,1	1,75	2,8	4,4	7	11
630	800	10	13	18	25	36	50	80	125	200	320	500	0,8	1,25	2	3,2	5	8	12,5
800	1000	11	15	21	28	40	56	90	140	230	360	560	0,9	1,4	2,3	3,6	5,6	9	14
1000	1250	13	18	24	33	47	66	105	165	260	420	660	1,05	1,65	2,6	4,2	6,6	10,5	16,5
1250	1600	15	21	29	39	55	78	125	195	310	500	780	1,25	1,95	3,1	5	7,8	12,5	19,5
1600	2000	18	25	35	46	65	92	150	230	370	600	920	1,5	2,3	3,7	6	9,2	15	23
2000	2500	22	30	41	55	78	110	175	280	440	700	1100	1,75	2,8	4,4	7	11	17,5	28
2500	3150	26	36	50	68	96	135	210	330	540	860	1350	2,1	3,3	5,4	8,6	13,5	21	33

⁽¹⁾ For dimensions > 500 mm the standard tolerance grades are only experimental

⁽²⁾ Not to be used with dimensions < 1 mm

Materials chemical resistance

Material	PE HabiPLAST®		PA Habilon		POM Habital		PP Habipro	
Chemicals	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Acetic Acid > 5%	●	●	○	○	●	○	●	●
Acetic Acid > 5%	●	●	●	○	●	—	●	●
Acetone	●	●	●	●	●	●	●	●
Alcohol - all types	●	●	●	●	●	●	●	●
Aluminium comp.	●	●	●	●	—	—	●	●
Ammonia	●	●	●	●	●	●	●	●
Ammonium comp.	●	●	●	●	—	—	●	●
Aniline	●	○	—	—	—	●	●	●
Aqua Regia	●	○	○	○	—	—	○	○
Arsenic Acid	●	●	—	—	—	—	●	●
Barium comp.	●	●	●	●	—	—	●	●
Beer	●	●	—	—	●	—	●	●
Benzene	●	○	●	●	●	●	●	○
Benzenesulfonic Acid - 10%	●	●	—	—	—	—	●	●
Benzoic Acid	●	●	●	●	—	—	●	●
Beverages (soft-drinks)	●	●	●	●	●	●	●	●
Borax	●	●	—	—	—	—	●	●
Boric Acid	●	●	●	●	—	—	●	●
Brine - 10%	●	●	—	—	●	●	●	●
Butyl Acrylate	●	●	—	—	—	—	○	○
Butyric Acid	●	●	●	●	—	—	●	—
Butter	●	—	●	—	●	—	●	—
Carbon Dioxide	●	●	●	●	—	—	●	●
Carbon Disulfide	●	○	●	●	—	—	●	○
Carbon Tetrachloride	●	○	●	●	●	●	●	○
Cheese	●	—	○	—	●	—	●	—
Chloroacetic Acid	●	●	○	○	—	—	●	●
Chlorine - Gas	●	○	○	○	○	○	○	○
Chlorine - Liquid	○	○	○	○	○	○	○	○

Material	PE HabiPLAST®		PA Habilon		POM Habital		PP Habipro	
Chemicals	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Chlorine Water - 4%	●	●	○	○	○	○	●	●
Chlorobenzene	●	○	●	●	●	●	○	○
Chloroform	○	○	●	—	○	○	○	○
Chocolate	●	—	○	—	●	—	—	—
Chromic Acid - 50%	●	●	●	—	○	○	●	●
Chromic Acid - 3%	●	●	—	—	●	●	●	●
Citric Acid - 40%	●	●	●	●	●	●	●	●
Citric Acid - 10%	●	●	●	●	●	—	●	●
Citrus Juices	●	●	●	●	●	—	●	●
Coconut Oil	●	●	●	—	●	●	●	●
Copper comp.	●	●	●	—	—	—	●	●
Corn Oil	●	●	●	—	●	●	●	●
Cottonseed Oil	●	●	●	—	●	●	●	●
Cresol	●	●	○	○	—	—	●	●
Cyclohexane	○	○	●	—	—	—	●	●
Cyclohexanone	○	○	●	—	—	—	●	●
Detergents	●	●	●	—	●	●	●	●
Dextrin	●	●	—	—	—	—	●	●
Dibutyl Phthalate	●	●	●	●	—	—	●	●
Diethyl Ether	○	○	●	●	●	●	○	○
Diethylamine	●	○	—	—	—	—	●	●
Diglycolic Acid - 30%	●	●	—	—	—	—	●	●
Diisooctyl Phthalate	●	●	—	—	—	—	●	●
Dimethyl Phthalate	●	●	—	—	—	—	●	●
Dimethylamine	●	—	●	●	—	—	●	—
Diethyl Phthalate	●	—	●	●	—	—	●	—
Ethyl Acetate	●	●	●	●	●	○	●	●
Ethyl Ether	●	●	—	—	—	—	●	●
Ethylamine	●	●	—	—	—	—	●	●

Legend: ● = resistant ● = limited resistance ○ = not resistant

Materials chemical resistance

Material	PE HabiPLAST®		PA Habilon		POM Habitall		PP HabiPro	
Chemicals	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Ethylene Glycol 50%	●	●	●	●	●	●	●	●
Ferric/Ferrous Comp.	●	●	—	—	●	○	●	●
Formaldehyde - 37%	●	●	—	—	●	●	●	●
Formic Acid - 85%	●	●	●	○	—	—	●	●
Freon	●	●	—	—	●	●	—	—
Fuel Oil #2	●	○	●	●	●	●	●	●
Fruit Juices	●	●	●	—	●	—	●	●
Furfural	●	○	●	—	—	—	●	●
Gasoline	●	○	●	●	●	●	●	○
Glucose	●	●	—	—	●	●	●	●
Glycerol	●	●	●	●	—	—	●	●
Heptane	●	○	●	●	●	●	○	○
Hexane	○	○	●	●	●	—	●	●
Hydrobromic Acid 50%	●	●	○	○	—	—	●	●
Hydrochloric Acid 35%	●	●	○	○	○	○	●	●
Hydrochloric Acid 10%	●	●	○	○	○	○	●	●
Hydrofluoric Acid 35%	●	●	○	○	○	○	●	●
Hydrogen Peroxid 3%	●	●	●	●	●	●	●	●
Hydrogen Peroxide 90%	●	●	○	○	●	○	●	●
Hydrogen Sulfide	●	●	●	●	—	—	○	○
Igepal - 50%	—	—	—	—	●	●	●	●
Iodine - Chrystals	●	●	○	○	○	○	●	●
Isooctane	●	—	●	●	—	—	○	○
Isopropyl Alcohol	●	●	●	●	●	●	●	●
Jet Fuel	●	●	●	●	●	●	●	○
Kerosene	●	●	—	—	●	●	●	○
Lactic Acid	●	●	●	○	—	—	●	●
Lanolin	●	●	—	—	—	—	●	●
Malic Acid - 50%	●	●	●	—	—	—	●	●

Material	PE HabiPLAST®		PA Habilon		POM Habitall		PP HabiPro	
Chemicals	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Manganese Sulfate	●	●	●	●	—	—	●	●
Margarine	●	●	●	●	—	—	●	—
Mercury	●	●	—	—	—	—	●	●
Methyl Chloride	●	●	●	—	—	—	●	●
Methyl Ethyl Ketone	●	●	●	●	—	—	●	●
Methyl Isobut. Ketone	○	○	●	—	●	●	●	●
Methylsulfuric Acid	—	—	—	—	—	—	●	●
Methylene Chloride	●	●	—	—	—	—	●	●
Milk	○	○	●	●	—	—	●	○
Mineral Oil	●	●	●	●	●	●	●	●
Mineral Spirits	●	●	●	—	●	●	●	○
Molasses	●	●	—	—	—	—	●	○
Motor Oil	●	●	●	●	—	—	●	●
Naphta	●	●	●	●	●	●	—	—
Nitric Acid - 30%	●	○	●	●	—	—	●	●
Nitric Acid - 50%	●	●	○	○	○	○	●	●
Nitrobenzene	●	●	○	○	○	○	●	○
Nitrous Acid	○	○	●	—	—	—	●	●
Nitrous Oxide	●	●	—	—	—	—	●	—
Oleic Acid	●	●	—	—	—	—	●	—
Olive Oil	●	●	●	●	●	●	●	○
Oxalic Acid	●	●	—	—	—	—	●	●
Ozone	●	●	—	—	—	—	●	●
Palmitic Acid - 70%	●	○	●	●	○	○	●	●
Paraffin	●	●	●	—	—	—	●	●
Peanut Oil	●	●	●	●	●	●	●	●
Perchloric Acid 20%	●	●	●	—	—	—	●	●
Perchloroethylene	●	●	—	—	—	—	●	●
Phthalic Acid - 50%	○	○	●	○	—	—	○	○


Legend: ● = resistant ● = limited resistance ○ = not resistant

Materials chemical resistance

Material	PE HabiPLAST®		PA Habilon		POM Habital		PP Habipro	
Chemicals	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Phenol	●	●	—	—	—	—	●	●
Phenol 5%	●	●	○	○	○	○	●	●
Phosphoric Acid 30%	●	●	○	○	○	○	●	●
Phosphoric Acid 85%	●	●	○	○	●	○	●	●
Photographic Solutions	●	●	○	○	●	○	●	●
Plating Solutions	●	●	●	—	—	—	●	●
Potassium comp.	●	●	—	—	—	—	●	●
Potassium Hydroxide	●	●	●	—	●	●	●	●
Potassium Iodide (3% Iodine)	●	●	●	—	●	●	●	●
Potassium Permanganate	●	●	—	—	—	—	●	●
Sea Water	●	—	●	—	●	—	●	—
Silver Cyanide	●	●	○	○	—	—	●	●
Silver Nitrate	●	●	—	—	—	—	●	●
Sodium Comp.	●	●	—	—	—	—	●	●
Sodium Chlorite	●	●	—	—	—	—	●	●
Sodium Hydroxide	●	●	○	○	—	—	●	●
Sodium Hydroxide 60%	●	●	○	○	●	●	●	●
Sodium Hypo-chlorite (5% Cl)	●	●	○	○	●	●	●	●
Stearic Acid	●	●	●	—	○	○	●	●
Sulfamic Acid 20%	●	●	●	●	●	—	●	●
Sulfate Liquors	●	●	○	○	—	—	●	●
Sulfur	●	●	—	—	—	—	●	●

Material	PE HabiPLAST®		PA Habilon		POM Habital		PP Habipro	
Chemicals	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F	20°C 70°F	60°C 140°F
Sulfur Chloride	●	●	●	●	—	—	●	●
Sulfur Dioxide	●	—	—	—	—	—	●	—
Sulfuric Acid 10%	●	●	●	●	○	○	●	●
Sulfuric Acid 50%	●	●	○	○	●	○	●	●
Sulfuric Acid 70%	●	●	○	○	○	○	●	●
Sulfurous Acid	●	●	○	○	○	○	●	●
Tannic Acid 10%	●	●	●	●	—	—	●	—
Tartaric Acid	●	●	—	—	—	—	●	●
Tetrahydrofuran	●	●	●	●	—	—	●	●
Toluene	—	—	●	—	●	●	●	○
Transformer Oil	○	○	●	●	●	○	○	○
Tributyl Phosphate	●	●	●	●	—	—	●	●
Trichloroacetic Acid	●	●	—	—	—	—	●	●
Trichloroethylene	●	—	○	○	—	—	●	●
Trisodium Phosphate	○	○	●	○	●	●	○	○
Tricresyl Phosphate	●	●	—	—	—	—	●	●
Turpentine	●	●	—	—	—	—	●	●
Urea	●	○	●	●	●	—	●	○
Vinegar	●	●	●	●	—	—	●	●
Wine	—	—	●	●	●	●	●	●
Whisky	●	—	●	—	●	—	●	—
Xylene	●	●	●	●	●	●	●	●

Legend: ● = resistant ● = limited resistance ○ = not resistant

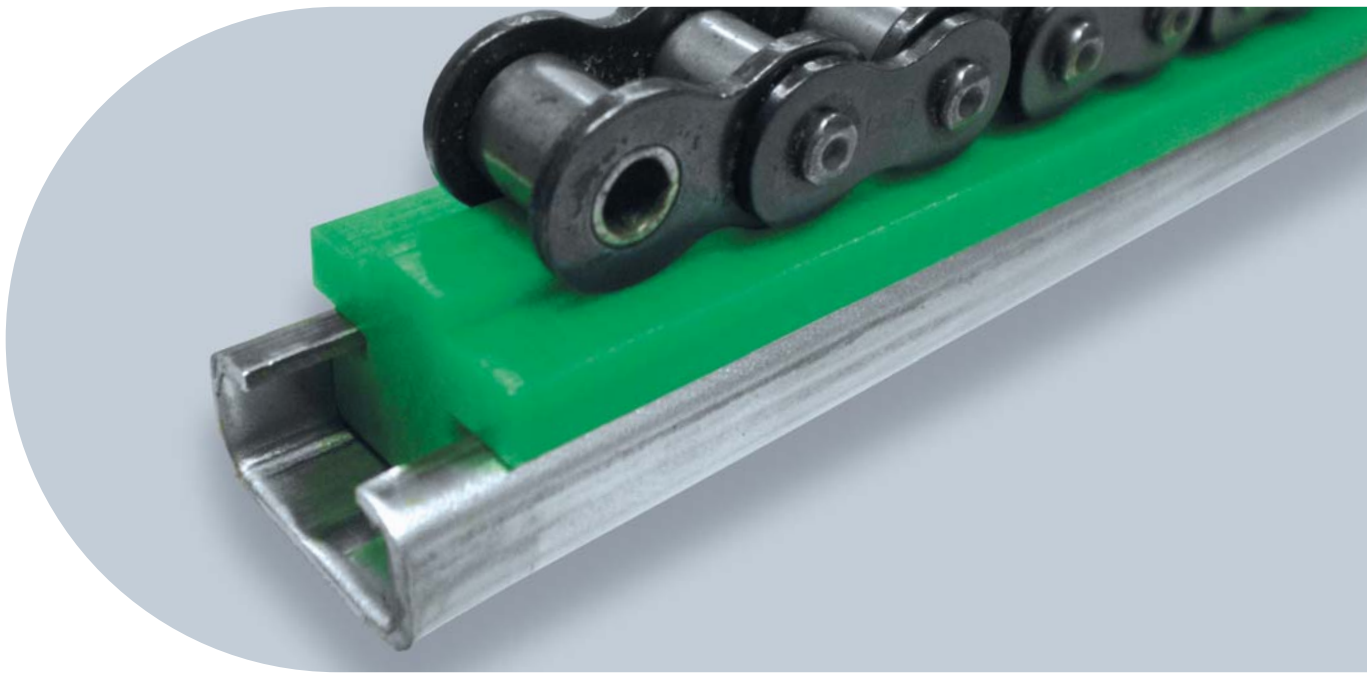



Guide profiles

HabiPLAST® guide profiles are the best solution for improving performances and reducing maintenance of roller chains, V-belts or round belts.

- Excellent sliding of the chain
- Great wear resistance
- Low coefficient of friction (less driving power required)
- Low noise
- Good resistance against impacts also at low temperature
- High chemical resistance
- Easy and quick assembly
- Corrosion resistance

The standard material for guide profiles is HabiPLAST® UHR/G green but other materials are available on demand. Habasit offers a full range of guides and can produce any kind of profile according to customer's specifications.

T1 guides for single roller chains

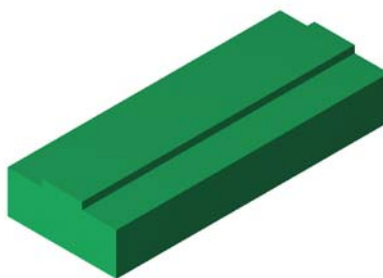

ISO chains



Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	h [mm]
T1-01	3/8" x 7/32"	06-B1	15	10	5,4	1,5
T1-05	1/2" x 5/16"	08-B1	20	10	7,4	2,2
T1-06	1/2" x 5/16"	08-B1	20	15	7,4	2,2
T1-07	1/2" x 5/16"	08-B1	20	20	7,4	2,2
T1-09	5/8" x 3/8"	10-B1	20	10	9,2	2,6
T1-10	5/8" x 3/8"	10-B1	20	15	9,2	2,6
T1-11	5/8" x 3/8"	10-B1	20	20	9,2	2,6
T1-13	3/4" x 7/16"	12-B1	25	10	11,3	2,4
T1-14	3/4" x 7/16"	12-B1	25	15	11,3	2,4
T1-15	3/4" x 7/16"	12-B1	25	20	11,3	2,4
T1-18	1" x 17mm	16-B1	40	15	16,5	3,5
T1-19	1" x 17mm	16-B1	40	20	16,5	3,5
T1-21	1 1/4" x 3/4"	20-B1	45	15	19	4,3
T1-22	1 1/4" x 3/4"	20-B1	45	20	19	4,3
T1-24	1 1/2" x 1"	24-B1	60	15	24,6	5,6
T1-25	1 1/2" x 1"	24-B1	60	20	24,6	5,6
T1-27	1 3/4" x 31mm	28-B1	75	20	30	6,9
T1-30	2" x 31mm	32-B1	80	20	30	7,8

ASA chains

Type	Chains	Ref. ASA	B [mm]	H [mm]	b [mm]	h [mm]
T1-51	3/8" x 3/16"	ASA 35	15	10	4	2,2
T1-54	1/2" x 5/16"	ASA 40	20	10	7,1	2,3
T1-55	1/2" x 5/16"	ASA 40	20	15	7,1	2,3
T1-56	1/2" x 5/16"	ASA 40	20	20	7,1	2,3
T1-58	5/8" x 3/8"	ASA 50	20	10	8,6	2,7
T1-59	5/8" x 3/8"	ASA 50	20	15	8,6	2,7
T1-60	5/8" x 3/8"	ASA 50	20	20	8,6	2,7
T1-62	3/4" x 1/2"	ASA 60	25	10	11,9	3,4
T1-63	3/4" x 1/2"	ASA 60	25	15	11,9	3,4
T1-64	3/4" x 1/2"	ASA 60	25	20	11,9	3,4
T1-66	1" x 5/8"	ASA 80	40	15	15,1	4,5
T1-68	1" x 5/8"	ASA 80	40	20	15,1	4,5

- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Standard length is 3 m, other lengths available on demand up to max 6 m

T2 guides for double roller chains

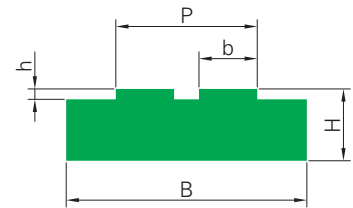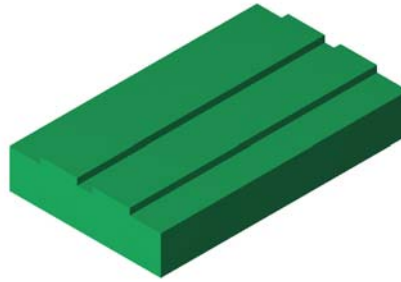

ISO chains


Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	h [mm]	P [mm]
T2-01	3/8" x 7/32"	06-B2	25	10	5,4	1,5	15,8
T2-05	1/2" x 5/16"	08-B2	35	10	7,4	2,2	21,4
T2-06	1/2" x 5/16"	08-B2	35	15	7,4	2,2	21,4
T2-07	1/2" x 5/16"	08-B2	35	20	7,4	2,2	21,4
T2-09	5/8" x 3/8"	10-B2	40	10	9,2	2,6	25,8
T2-10	5/8" x 3/8"	10-B2	40	15	9,2	2,6	25,8
T2-11	5/8" x 3/8"	10-B2	40	20	9,2	2,6	25,8
T2-13	3/4" x 7/16"	12-B2	45	15	11,3	2,4	30,8
T2-14	3/4" x 7/16"	12-B2	45	20	11,3	2,4	30,8
T2-15	1" x 17mm	16-B2	65	15	16,5	3,5	48,4
T2-18	1" x 17mm	16-B2	65	20	16,5	3,5	48,4
T2-19	1 1/4" x 3/4"	20-B2	70	15	19	4,3	54,5
T2-21	1 1/4" x 3/4"	20-B2	70	20	19	4,3	54,5
T2-22	1 1/2" x 1"	24-B2	88	20	24,6	5,6	73
T2-24	1 3/4" x 31mm	28-B2	105	25	30	6,9	89,6
T2-25	2" x 31mm	32-B2	105	30	30	7,8	88,7

ASA chains

Type	Chains	Ref. ASA	B [mm]	H [mm]	b [mm]	h [mm]	P [mm]
T2-51	3/8" x 3/16"	ASA 35.2	25	10	4	2,2	14,13
T2-55	1/2" x 5/16"	ASA 40.2	35	10	7,1	2,3	21,48
T2-56	1/2" x 5/16"	ASA 40.2	25	15	7,1	2,3	21,48
T2-57	1/2" x 5/16"	ASA 40.2	35	20	7,1	2,3	21,48
T2-59	5/8" x 3/8"	ASA 50.2	40	10	8,6	2,7	26,71
T2-60	5/8" x 3/8"	ASA 50.2	40	15	8,6	2,7	26,71
T2-61	5/8" x 3/8"	ASA 50.2	40	20	8,6	2,7	26,71
T2-63	3/4" x 1/2"	ASA 60.2	45	10	11,9	3,4	34,68
T2-64	3/4" x 1/2"	ASA 60.2	45	15	11,9	3,4	34,68
T2-65	3/4" x 1/2"	ASA 60.2	45	20	11,9	3,4	34,68
T2-67	1" x 5/8"	ASA 80.2	55	15	15,1	4,5	44,39
T2-68	1" x 5/8"	ASA 80.2	55	20	15,1	4,5	44,39


- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Standard length is 3 m, other lengths available on demand up to max 6 m

T3 guides for triple roller chains

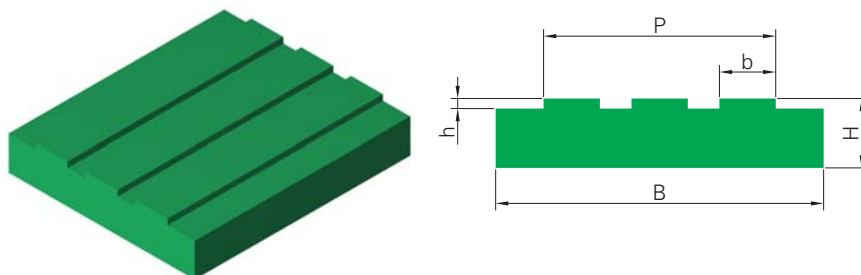

Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	h [mm]	P [mm]
T3-01	3/8" x 7/32"	06-B3	35	10	5,4	1,5	25,9
T3-05	1/2" x 5/16"	08-B3	45	10	7,4	2,2	35,2
T3-06	1/2" x 5/16"	08-B3	45	15	7,4	2,2	35,2
T3-07	1/2" x 5/16"	08-B3	45	20	7,4	2,2	35,2
T3-09	5/8" x 3/8"	10-B3	55	10	9,2	2,6	42,4
T3-10	5/8" x 3/8"	10-B3	55	15	9,2	2,6	42,4
T3-11	5/8" x 3/8"	10-B3	55	20	9,2	2,6	42,4
T3-13	3/4" x 7/16"	12-B3	60	15	11,3	2,4	50,2
T3-14	3/4" x 7/16"	12-B3	60	20	11,3	2,4	50,2
T3-15	1" x 17mm	16-B3	95	20	16,5	3,5	80,3



ET guides for metallic profile for single overlapped chains

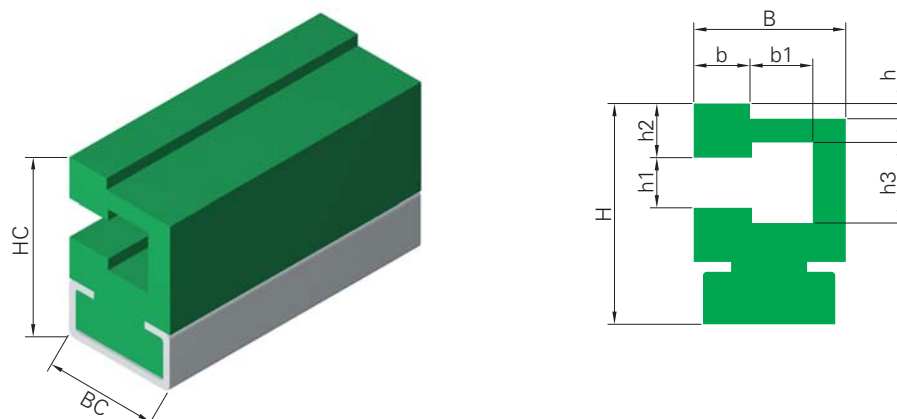

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	b1 [mm]	h [mm]	h1 [mm]	h2 [mm]	h3 [mm]
ET-00	3/8" x 7/32"	06-B1	C-3	20	28,7	20	26,4	5,4	4,4	1,4	6,6	5,5	9,3
ET-01	1/2" x 5/16"	08-B1	C-3	20	30,5	20	28	7,4	5,9	2	8,7	7,3	12,8
ET-02	5/8" x 3/8"	10-B1	C-3	20	36	20	34,1	9,2	5,3	2,5	10,7	9,5	15,4
ET-03	3/4" x 7/16"	12-B1	C-5	28	41,5	24	38,5	11,3	6	2,3	12,3	10,5	16,9
ET-04	1" x 17mm	16-B1	C-9	38	61,5	33,5	52,4	16,5	10,7	4,1	16,1	18,3	24,4



- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

T1C guides for metallic profile for single roller chains

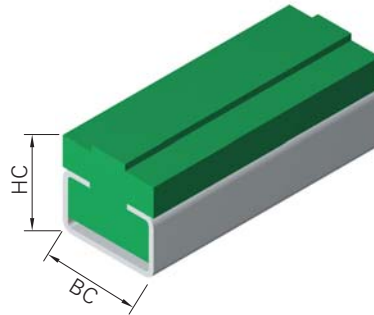

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	h [mm]
T1C-31	3/8" x 7/32"	06-B1	C-3	20	17	20	15	5,4	1,5
T1C-33	1/2" x 5/16"	08-B1	C-3	20	17	20	15	7,4	2,2
T1C-34	5/8" x 3/8"	10-B1	C-3	20	17	20	15	9,2	2,6
T1C-35	3/4" x 7/16"	12-B1	C-3	20	17	20	15	11,3	2,4
T1C-36	1" x 17mm	16-B1	C-5	28	18	28	15	16,5	3,5
T1C-37	1 1/4 x 3/4"	20-B1	C-9	38	27	38	20	19	4,3



T2C guides for metallic profile for double roller chains

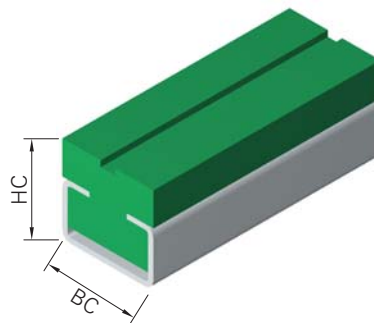

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	h [mm]
T2C-31	3/8" x 7/32"	06-B2	C-3	20	17	15,7	15	5,4	1,5
T2C-33	1/2" x 5/16"	08-B2	C-3	20	17	21,4	15	7,4	2,2
T2C-34	5/8" x 3/8"	10-B2	C-5	28	19	25,9	15	9,2	2,6
T2C-35	3/4" x 7/16"	12-B2	C-5	28	19	30,7	15	11,3	2,4
T2C-36	1" x 17mm	16-B2	C-9	38	27	48,3	20	16,5	3,5



- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

E1 guides for single roller chains

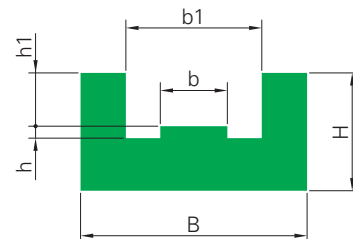

Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	b1 [mm]	h [mm]	h1 [mm]
E1-01	3/8" x 7/32"	06-B1	25	10	5,4	15	1,5	4,4
E1-05	1/2" x 5/16"	08-B1	30	15	7,4	20	2,2	7,2
E1-06	5/8" x 3/8"	10-B1	33	20	9,2	23	2,6	9,5
E1-07	3/4" x 7/16"	12-B1	38	20	11,3	28	2,4	11,1
E1-10	1" x 17mm	16-B1	51	25	16,5	41	3,5	16,5



E2 guides for double roller chains

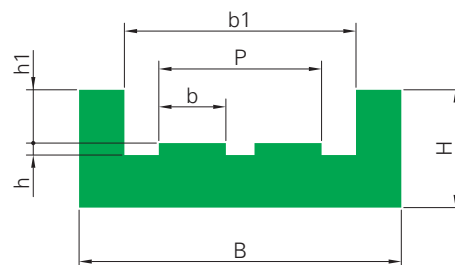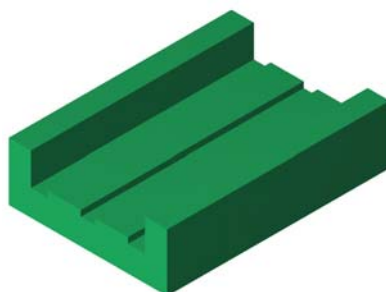

Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	b1 [mm]	P [mm]	h [mm]	h1 [mm]
E2-01	3/8" x 7/32"	06-B2	36	15	5,4	26	15,8	1,5	4,4
E2-05	1/2" x 5/16"	08-B2	45	20	7,4	35	21,4	2,2	7,2
E2-06	5/8" x 3/8"	10-B2	50	25	9,2	40	25,8	2,6	9,5
E2-07	3/4" x 7/16"	12-B2	56	25	11,3	46	30,8	2,4	11,1
E2-10	1" x 17mm	16-B2	85	30	16,5	75	48,8	3,5	16,5



- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Standard length is 3 m, other lengths available on demand up to max 6 m

E1C guides for metallic profile for single roller chains

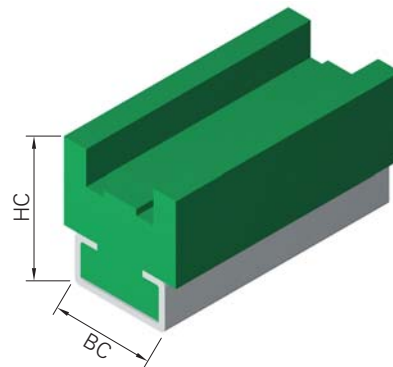

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	b1 [mm]	h [mm]	h1 [mm]
E1C-01	3/8" x 7/32"	06-B1	C-3	20	20	25	18	5,4	15	1,5	4,4
E1C-05	1/2" x 5/16"	08-B1	C-3	20	27	30	25	7,4	20	2,2	7,2
E1C-06	5/8" x 3/8"	10-B1	C-5	28	32	33	30	9,2	23	2,6	9,5
E1C-07	3/4" x 7/16"	12-B1	C-9	38	38,5	38	35	11,3	28	2,4	11,1
E1C-10	1" x 17mm	16-B1	C-9	38	43,5	51	40	16,5	41	3,5	16,5



E2C guides for metallic profile for double roller chains

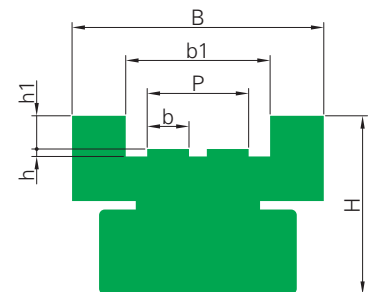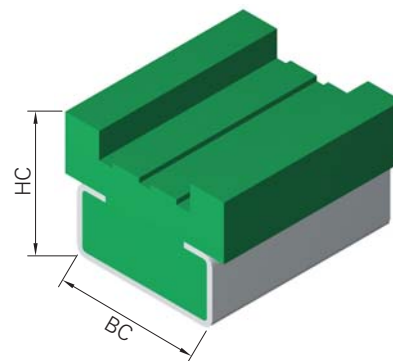

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	b1 [mm]	h [mm]	h1 [mm]	P [mm]
E2C-01	3/8" x 7/32"	06-B2	C-5	28	22	36	18	5,4	26	1,5	4,4	15,8
E2C-05	1/2" x 5/16"	08-B2	C-9	38	33	45	25	7,4	35	2,2	7,2	21,4
E2C-06	5/8" x 3/8"	10-B2	C-9	38	37	50	30	9,2	40	2,6	9,5	25,8
E2C-07	3/4" x 7/16"	12-B2	C-9	38	38,5	56	35	11,3	46	2,4	11,1	30,8
E2C-10	1" x 17mm	16-B2	C-9	38	43,5	85	40	16,5	75	3,5	16,5	48,4



- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

U guides for vertical roller chains

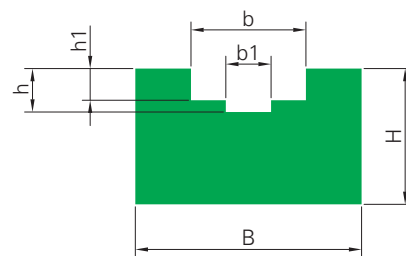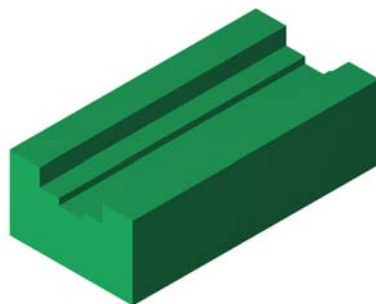

Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	b1 [mm]	h [mm]	h1 [mm]
U-01	13/8" x 7/32"	06-B1	20	15	9,2	4	4,2	2,8
U-02	1/2" x 5/16"	08-B1	25	15	12,7	5	4,8	3,5
U-03	5/8" x 3/8"	10-B1	25	15	15,2	6	5,1	3,6
U-04	3/4" x 7/16"	12-B1	25	20	16,7	7	5,7	3,9
U-05	1" x 17mm	16-B1	35	25	24,4	9	10	8,4



UC guides for metallic profile for vertical roller chains

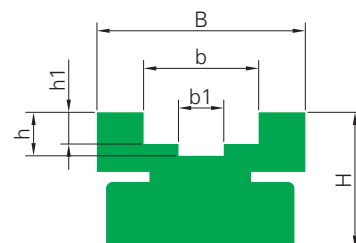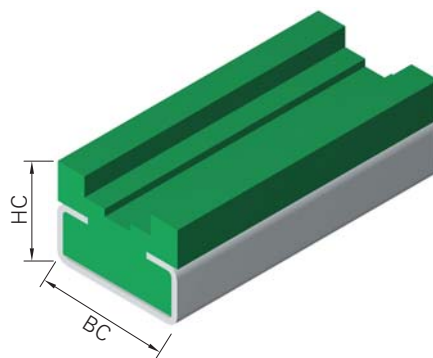

Type	Chains	Ref. ISO	Met. Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	b1 [mm]	h [mm]	h1 [mm]
UC-32	1/2" x 5/16"	08-B1	C-3	20	18	20	15	12,7	5	4,8	3,5
UC-33	5/8" x 3/8"	10-B1	C-3	20	18	23	15	15,2	6	5,1	3,6
UC-34	3/4" x 7/16"	12-B1	C-3	20	23	23	20	16,7	7	5,7	3,9
UC-35	1" x 17mm	16-B1	C-5	28	28	32	25	24,4	8	10	8,4



- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

BL guides for vertical single roller chains

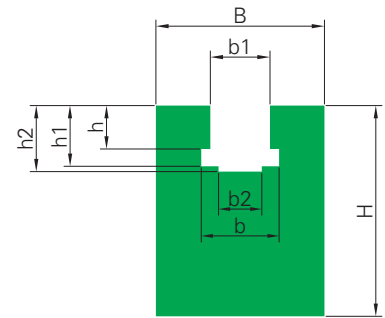

Type	Chains	Ref. ISO	B [mm]	H [mm]	b [mm]	b1 [mm]	b2 [mm]	h [mm]	h1 [mm]	h2 [mm]
BL-01	3/8" x 7/32"	06-B1	20	25	9,3	6,6	4	5,6	8,7	10
BL-05	1/2" x 5/16"	08-B1	24	30	12,8	8,7	5	7,6	11,5	13,5
BL-09	5/8" x 3/8"	10-B1	30	35	15,4	10,4	6	9,5	13,5	14,8
BL-15	3/4" x 7/16"	12-B1	40	35	16,9	12,3	7	11,5	15,9	17,5
BL-18	1" x 17mm	16-B1	40	45	24,4	16,1	9	16,1	25,7	26,8
BL-21	1 1/4" x 3/4"	20-B1	50	50	27,5	19,3	11	19,4	29,3	31,2
BL-24	1 1/2" x 1"	24-B1	60	60	36,5	25,7	16	25,2	38,2	40,1
BL-25	1 3/4" x 31mm	28-B1	60	70	41,5	28,3	17	30,8	46,9	48,9
BL-30	2" x 31mm	32-B1	70	75	44,5	29,6	19	30,8	47,3	53


BLC guides for metallic profile for vertical single roller chains

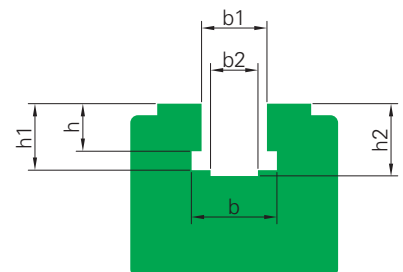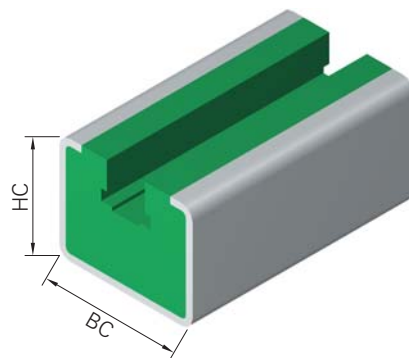

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	b [mm]	b1 [mm]	b2 [mm]	h [mm]	h1 [mm]	h2 [mm]
BLC-01	3/8" x 7/32"	06-B1	C-10	30	24	9,3	6,6	4	5,6	8,7	10
BLC-05	1/2" x 5/16"	08-B1	C-10	30	24	12,8	8,7	5	7,6	11,5	13,5
BLC-09	5/8" x 3/8"	10-B1	C-10	30	24	15,4	10,4	6	9,5	13,5	14,8
BLC-15	3/4" x 7/16"	12-B1	C-10	30	24	16,9	12,3	7	11,5	15,9	17,5
BLC-18	1" x 17mm	16-B1	C-11	45	40	24,4	16,1	9	16,1	25,7	26,8
BLC-21	1 1/4" x 3/4"	20-B1	C-11	45	40	27,5	19,3	11	19,5	29,3	31,2


- Standard material for chain guides is HabipLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

KC guides for metallic profile for vertical single roller chains

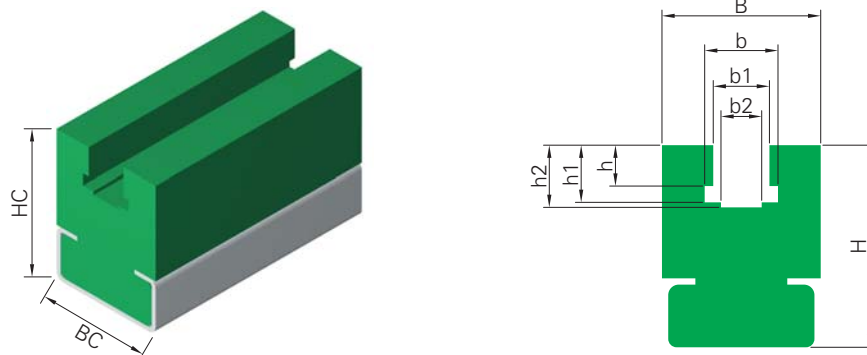

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	b1 [mm]	b2 [mm]	h [mm]	h1 [mm]	h2 [mm]
KC-01	3/8" x 7/32"	06-B1	C-3	20	21	20	17,5	9,3	6,6	4	5,6	8,7	10
KC-02	1/2" x 5/16"	08-B1	C-5	28	32	24	27,5	12,8	8,7	5	7,6	11,5	13,5
KC-03	5/8" x 3/8"	10-B1	C-5	28	32	24	27,5	15,4	10,4	6	9,5	13,5	14,8
KC-04	3/4" x 7/16"	12-B1	C-9	38	42	33	34	16,9	12,3	7	11,5	15,9	17,5
KC-05	1" x 17mm	16-B1	C-10	30	50	38	40	24,4	16,1	9	16,1	25,7	26,8



BKC guides for metallic profile for single roller chains

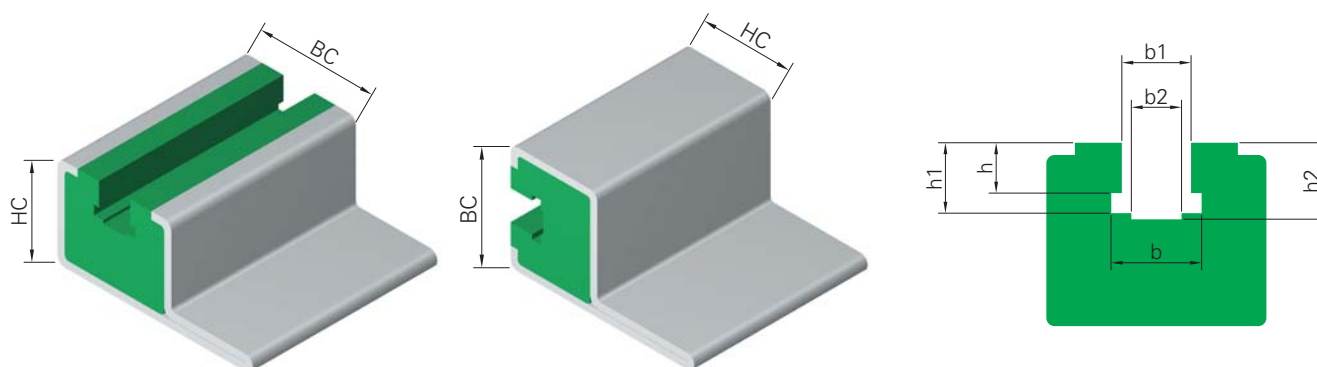

Type	Chains	Ref. ISO	Metallic Profile	BC [mm]	HC [mm]	b [mm]	b1 [mm]	b2 [mm]	h [mm]	h1 [mm]	h2 [mm]
BKC-01	3/8" x 7/32"	06-B1	C-14/C-15	31	25	9,3	6,6	4	5,6	8,7	10
BKC-05	1/2" x 5/16"	08-B1	C-14/C-15	31	25	12,8	8,7	5	7,6	11,5	13,5
BKC-09	5/8" x 3/8"	10-B1	C-14/C-15	31	25	15,4	10,4	6	9,5	13,5	14,8
BKC-15	3/4" x 7/16"	12-B1	C-14/C-15	31	25	16,9	12,3	7	11,5	15,9	17,5



- Standard material for chain guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

R guides for round belts

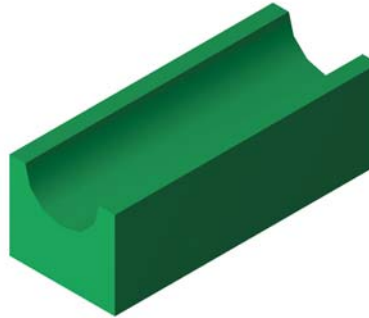

Type	Ø Round Belt [mm]	B [mm]	H [mm]	h [mm]	Ø [mm]
R-01	4	15	10	2	4
R-03	5	15	10	2,5	5
R-05	6	20	10	3	6
R-07	8	20	10	4	8
R-09	10	25	12	5	10
R-11	12	25	12	6	12
R-13	15	25	15	7,5	15
R-15	20	30	20	10	20



RC guides for metallic profile for round belts

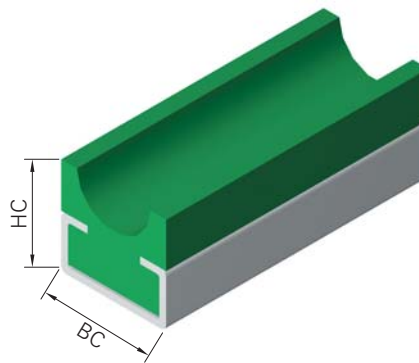

Type	Metallic Profile	Ø Round Belt [mm]	BC [mm]	HC [mm]	B [mm]	H [mm]	h [mm]	Ø [mm]
RC-02	C-3	4	20	14	20	10	2	4
RC-04	C-3	5	20	14	20	10	2,5	5
RC-06	C-3	6	20	14	20	10	3	6
RC-08	C-3	8	20	14	20	10	4	8
RC-10	C-5	10	28	18	25	15	5	10
RC-12	C-5	12	28	18	25	15	6	12
RC-14	C-5	15	28	20	25	15	7,5	15
RC-16	C-5	20	28	24	28	20	10	20



- Standard material for round belts guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

V guides for V-belts

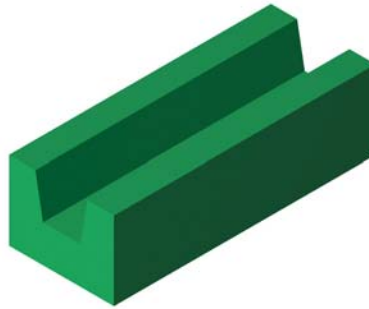

Type	V-Belt Section	V-Belt width [mm]	B [mm]	H [mm]	b [mm]	h [mm]
V-01	Z	10	20	10	6,5	3
V-03	A	13	20	12	8	5
V-05	SPB	15	25	12	9,5	5
V-07	B	17	30	15	10,5	8
V-09	C	22	35	20	13,5	11
V-11	D	30	40	25	19	13


VC guides for metallic profile for V-belts

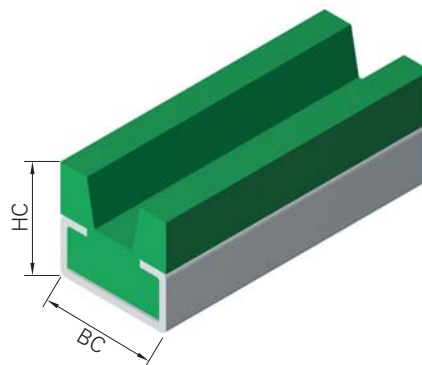

Type	Metallic Profile	V-Belt Section	V-Belt width [mm]	BC [mm]	HC [mm]	B [mm]	H [mm]	b [mm]	h [mm]
VC-02	C-3	Z	10	20	17	20	15	6,5	3
VC-04	C-3	A	13	20	17	20	15	8	5
VC-06	C-5	SPB	15	28	24	25	20	9,5	5
VC-08	C-5	B	17	28	24	30	20	10,5	8
VC-10	C-9	C	22	38	32	35	25	13,5	11
VC-12	C-9	D	30	38	35	40	25	19	13

- Standard material for V-belts guides is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m

PC slide rails
for metallic profile

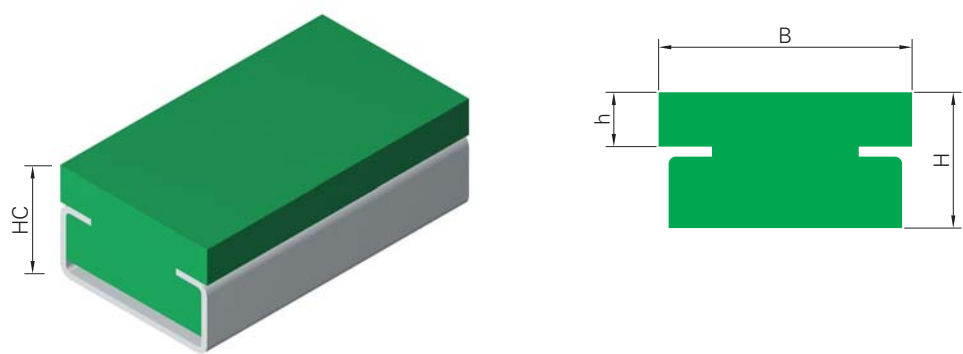


Type	Metallic Profile	HC [mm]	B [mm]	H [mm]	h [mm]
PC-01	C-3	14	20	10	4
PC-02	C-3	17	20	15	7
PC-03	C-3	22	20	20	12
PC-04	C-5	15	28	10	3
PC-05	C-5	18	28	15	6
PC-06	C-5	24	28	20	12
PC-07	C-9	21	38	10	3
PC-08	C-9	24	38	15	6
PC-09	C-9	30	38	20	12


- Standard material is HabiPLAST® UHR/G green, different materials are available on demand (see pages 6/7)
- Metallic profile is not included, it must be ordered separately (see pages 25/26)
- Standard length is 3 m, other lengths available on demand up to max 6 m
- We recommend to provide all the information needed about dimensions and material in order to avoid any incomprehension

Metallic profiles for HabiPLAST® guides


C-3/CI-3, C-5/CI-5, C-9/CI-9




C-10/CI-10, C-11/CI-11




C-14/CI-14




C-15/CI-15
AC-01



CI-16/CIE-16



Standard holes for C14/C15

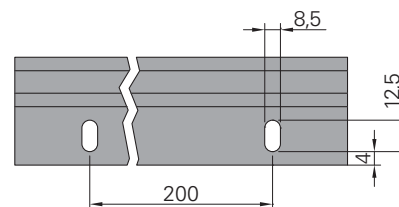

Type	Material	Weight [Kg/m]	B [mm]	H [mm]	b [mm]	d [mm]
C-3	Galvanized Steel	0,43	20	10	10	1,5
C-5	Galvanized Steel	0,85	28	12	14	1,5
C-9	Galvanized Steel	0,98	38	18	22	1,5
C-10	Galvanized Steel	0,94	30	24	20	1,5
C-11	Galvanized Steel	2,05	45	40	31	1,5
C-14	Galvanized Steel	1,2	31	25	20	2
C-15	Galvanized Steel	1,2	31	25	20	2




Type	Material [Aisi 304]	Weight [Kg/m]	B [mm]	H [mm]	b [mm]	d [mm]
CI-3	Stainless Steel	0,43	20	10	10	1,5
CI-5	Stainless Steel	0,85	28	12	14	1,5
CI-9	Stainless Steel	0,98	38	18	22	1,5
CI-10	Stainless Steel	0,94	30	24	20	1,5
CI-11	Stainless Steel	2,05	45	40	31	1,5
CI-14	Stainless Steel	1,2	31	25	20	2
CI-15	Stainless Steel	1,2	31	25	20	2
CI-16	Stainless Steel	0,9	29,8	19	8,8	1,5

Type	Material [Aisi 430]	Weight [Kg/m]	B [mm]	H [mm]	b [mm]	d [mm]
CIE-16	Stainless Steel	0,9	29,8	19	8,8	1,5

Type	Material	Weight [Kg/m]	B [mm]	H [mm]	b [mm]	d [mm]
AC-01	Aluminium Alloy	0,83	31	25	20	2,5




- Standard lengths are 2, 3, 4 and 6 m

CI-16/CIE-16 metallic profiles

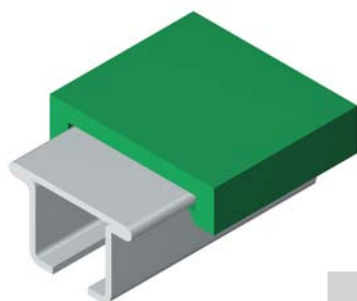




Type	Material	Weight [Kg/m]	B [mm]	H [mm]	b [mm]	d [mm]
CI-16	Inox 304	0,9	29,8	19	8,8	1,5
CIE-16	Inox 430	0,9	29,8	19	8,8	1,5

FC-20 fixing clamps for CI-16/CIE-16 metallic profiles

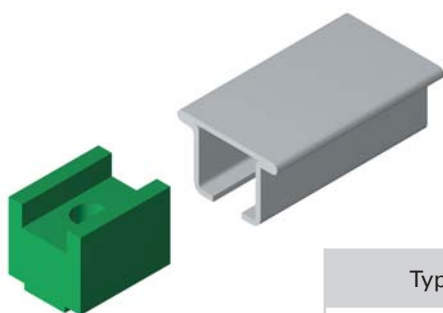

Type	Material	Colour	N° of clamps per box
FC-20	HabiPLAST®	Black/Green/White	200
FC-20	Habilon	Black/White	200
FC-20	Habital	Black/White	200


FC-50 connecting element for CI-16/CIE-16 metallic profiles

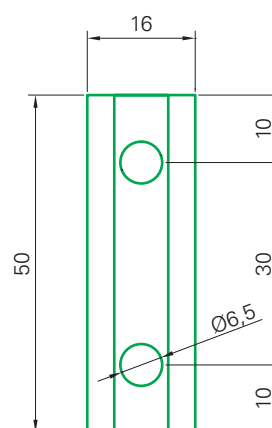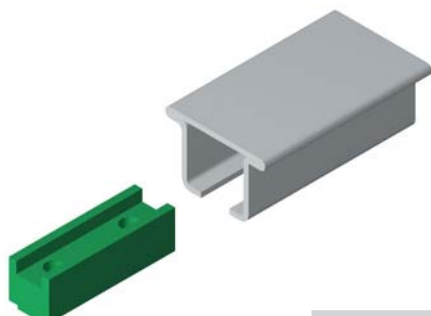

Type	Material	Colour	N° of clamps per box
FC-50	HabiPLAST®	Black/Green/White	100
FC-50	Habilon	Black/White	100
FC-50	Habital	Black/White	100

- Standard lengths for CI-16/CIE-16 metallic profiles are 2, 3, 4 and 6 m
- Screws not included. Specify the colour and the material in the order

Extruded profiles


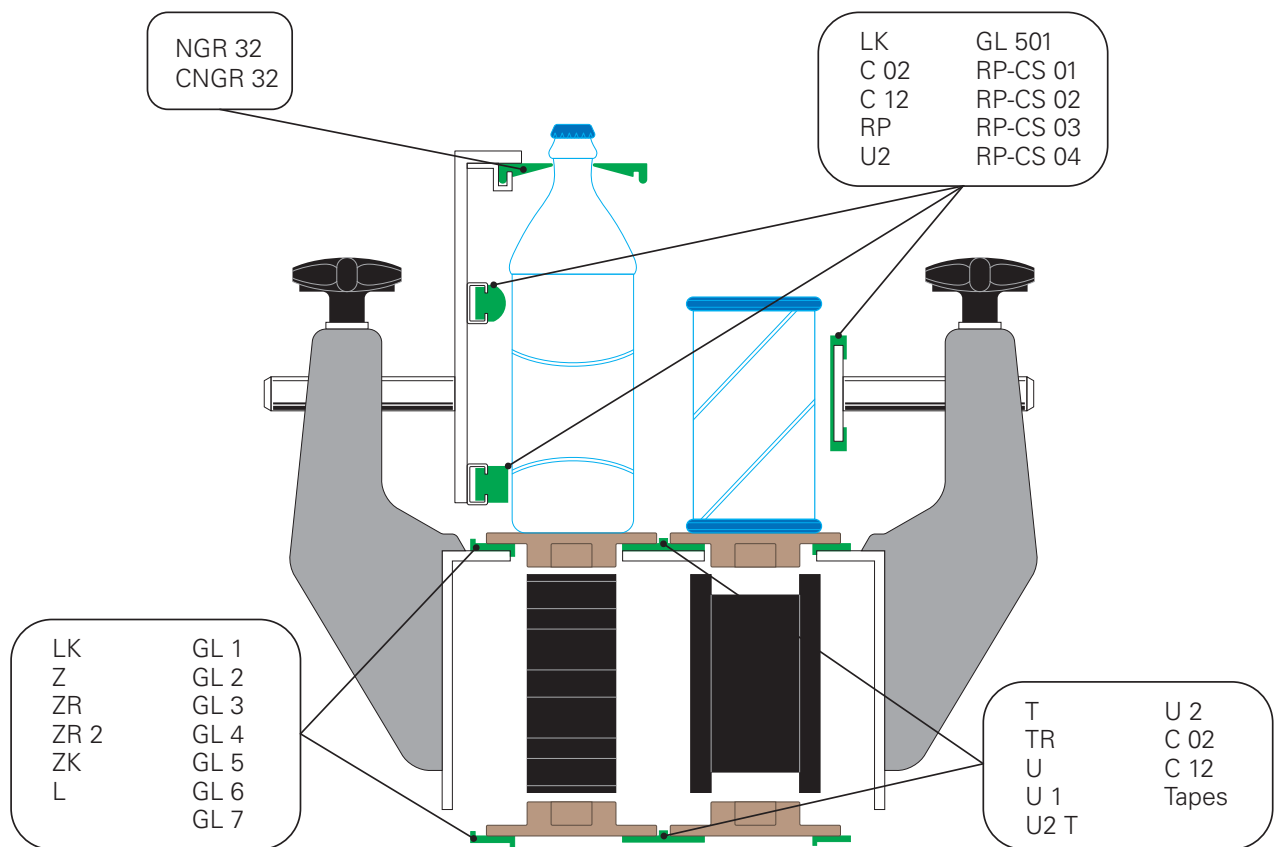


Extruded profiles

HabiPLAST® extruded profiles are the best complement for Habasit products as HabasitLINK® modular belts, HabaCHAIN® and whenever you need:



- Great wear resistance
- Low coefficient of friction
- Low noise
- Good resistance against impacts also at low temperature
- High chemical resistance
- Easy and quick assembly
- Corrosion resistance

LK20 profile

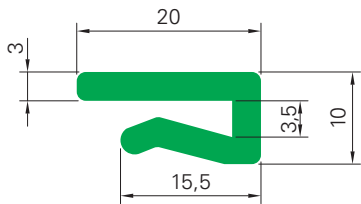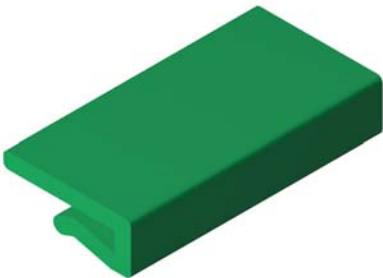



Type	Colour		Coil Length [m]	Bar Length [m]
LK20	G	Green	40	-
	B	Black		
	W	White		

LK25 profile

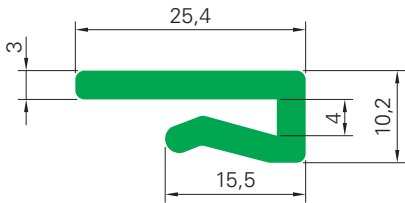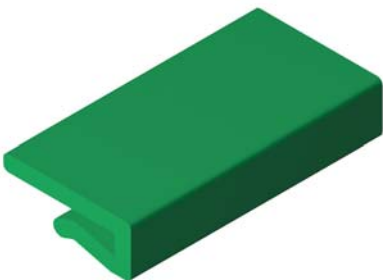

Type	Colour		Coil Length [m]	Bar Length [m]
LK25	G	Green	40	-
	B	Black		
	W	White		



LK40 profile

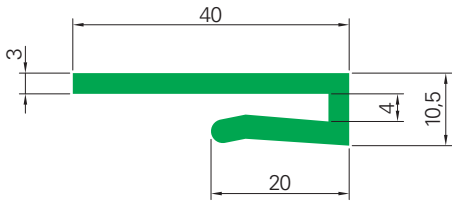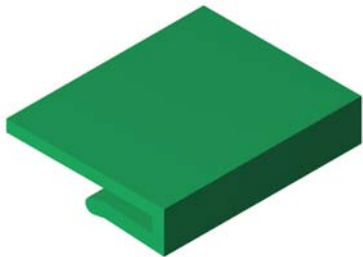

Type	Colour		Coil Length [m]	Bar Length [m]
LK40	G	Green	50	-
	B	Black		
	W	White		



PE Molecular weight: - White PE, Green PE = 4.000.000 - Black PE = 1.000.000
Profile suitable for plates with thickness 2 or 3 mm.

Z profile

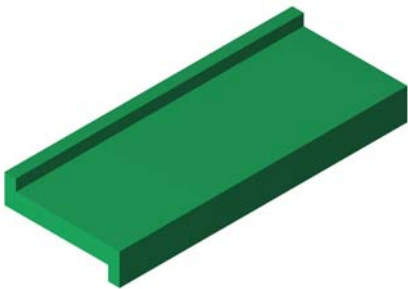



Type	Colour		Coil Length [m]	Bar Length [m]
Z	G	Green	50	-
	B	Black		
	W	White		

ZR profile

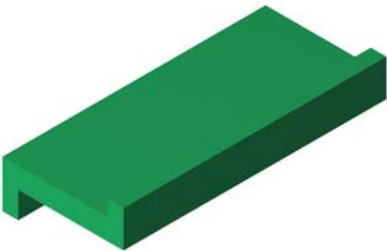

Type	Colour		Coil Length [m]	Bar Length [m]
ZR	G	Green	50	-
	B	Black		
	W	White		

ZR2 profile

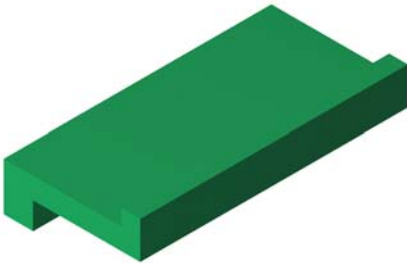



Type	Colour		Coil Length [m]	Bar Length [m]
ZR2	G	Green	50	3, 6
	B	Black		
	W	White		

PE Molecular weight:

- White PE, Green PE = 4.000.000



- Black PE = 1.000.000

ZK (D, E, F, G, H, J) profiles

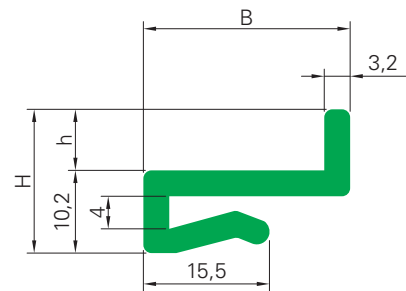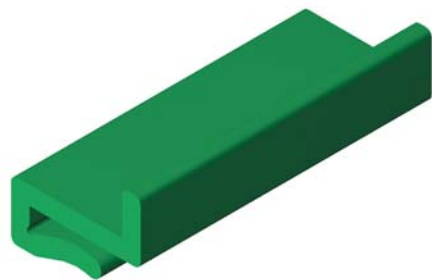

Type	Colour		Coil Length [m]	Bar Length [m]	B [mm]	H [mm]	h [mm]
ZK-D	G	Green	40	-	25,4	13,4	3,2
	B	Black					
	W	White					
ZK-E	G	Green	40	-	25,4	15	4,8
	B	Black					
	W	White					
ZK-F	G	Green	40	-	25,4	17,7	7,5
	B	Black					
	W	White					
ZK-G	G	Green	40	-	25,4	19,7	9,5
	B	Black					
	W	White					
ZK-H	G	Green	40	-	22,2	17,7	7,5
	B	Black					
	W	White					
ZK-J	G	Green	40	-	22,2	19,7	9,5
	B	Black					
	W	White					



ZK profile

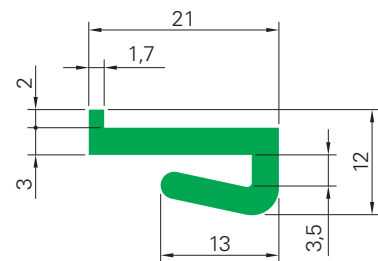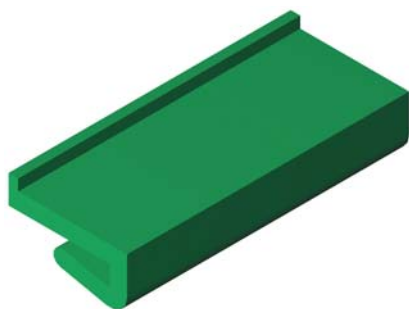

Type	Colour		Coil Length [m]	Bar Length [m]
ZK	G	Green	40	-
	B	Black		
	W	White		



PE Molecular weight: - White PE, Green PE = 4.000.000 - Black PE = 1.000.000
Profile suitable for plates with thickness 2 or 3 mm.

L profile

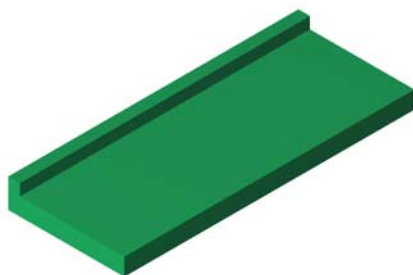



Type	Colour		Coil Length [m]	Bar Length [m]
L	G	Green	50	-
	B	Black		
	W	White		

T profile

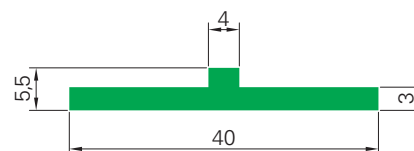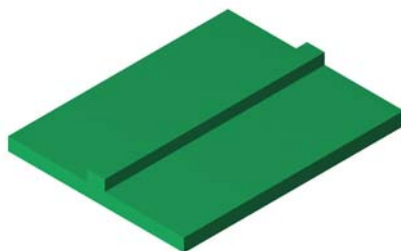

Type	Colour		Coil Length [m]	Bar Length [m]
T	G	Green	50	-
	B	Black		
	W	White		

TR profile (for CI-16/CIE-16 metallic profiles)

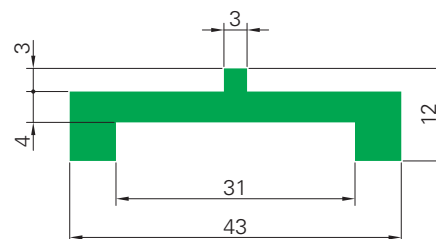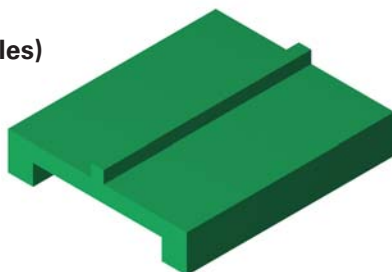



Type	Colour		Coil Length [m]	Bar Length [m]
TR	G	Green	50	3, 6
	B	Black		
	W	White		

PE Molecular weight:

- White PE, Green PE = 4.000.000



- Black PE = 1.000.000

U2T profile
(for CI-16/CIE-16 metallic profiles)

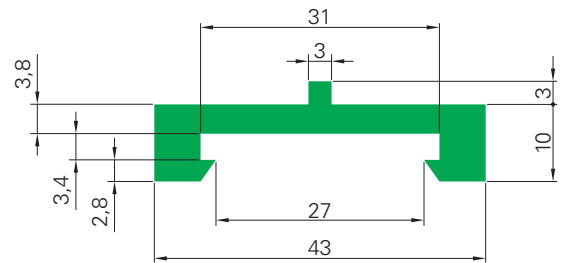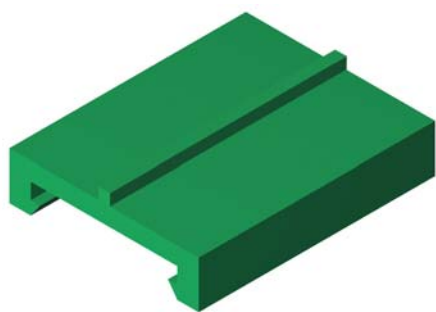



Type	Colour		Coil Length [m]	Bar Length [m]
U2T	G	Green	-	3, 6
	B	Black		
	W	White		

U2 profile
(for CI-16/CIE-16 metallic profiles)

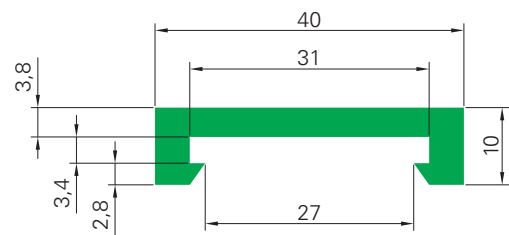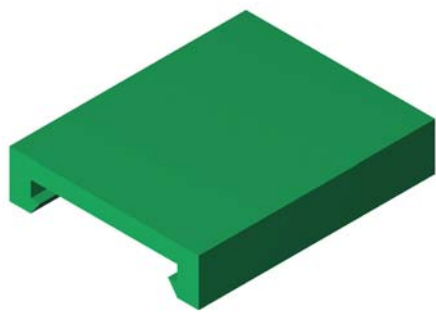



Type	Colour		Coil Length [m]	Bar Length [m]
U2	G	Green	-	3, 6
	B	Black		
	W	White		

U profile
(for CI-16/CIE-16 metallic profiles)

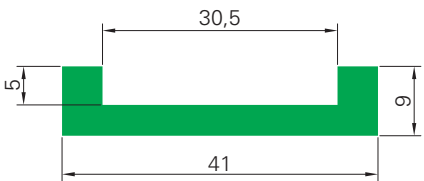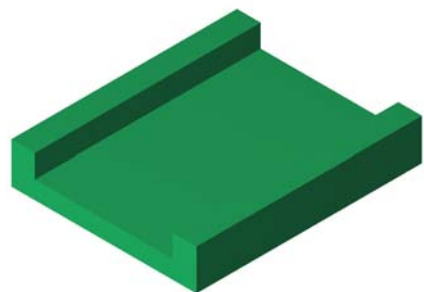



Type	Colour		Coil Length [m]	Bar Length [m]
U	G	Green	50	3, 6
	B	Black		
	W	White		

U1 profile
(for CI-16/CIE-16 metallic profiles)

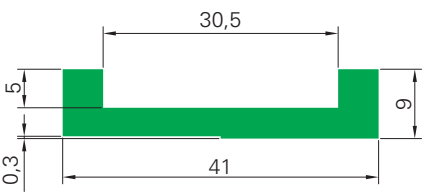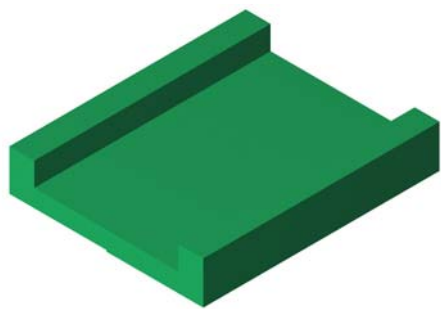



Type	Colour		Coil Length [m]	Bar Length [m]
U1	G	Green	50	3, 6
	B	Black		
	W	White		

C-02 profile
(for CI-16/CIE-16 metallic profiles)

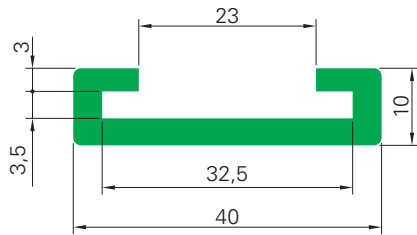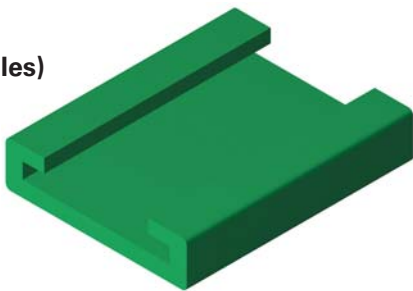



Type	Colour		Coil Length [m]	Bar Length [m]
C-02	G	Green	-	3, 6
	B	Black		
	W	White		

C-05 profile
(machined profile)

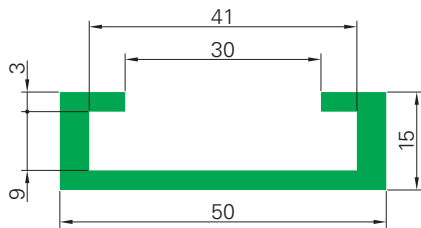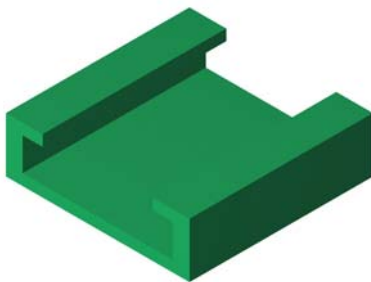

Type	Colour		Coil Length [m]	Bar Length [m]
C-05	G	Green	-	3
	B	Black		
	W	White		

C-07 profile
(machined profile)

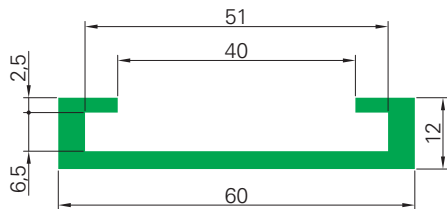
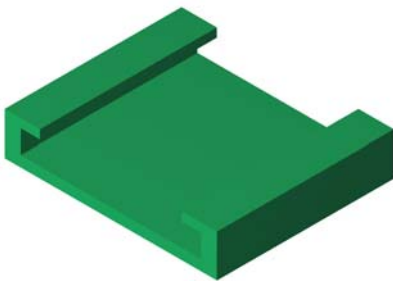


Type	Colour		Coil Length [m]	Bar Length [m]
C-07	G	Green	-	3
	B	Black		
	W	White		

PE Molecular weight for extruded profiles:
PE Molecular weight for machined profiles:



- White PE, Green PE = 4.000.000
- White PE = 500.000
- Black PE = 1.000.000
- Green PE, Black PE = 1.000.000

C-09 profile (machined profile)

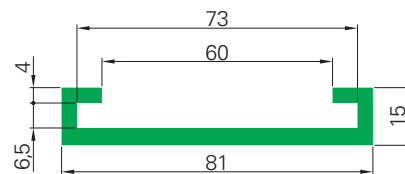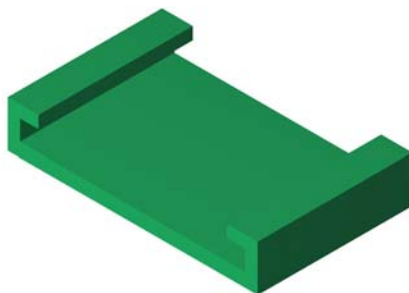



Type	Colour		Coil Length [m]	Bar Length [m]
C-09	G	Green	-	3
	B	Black		
	W	White		

C-12 profile

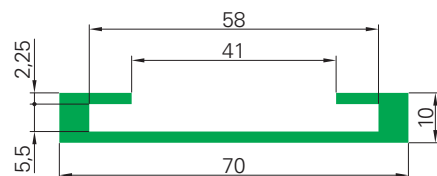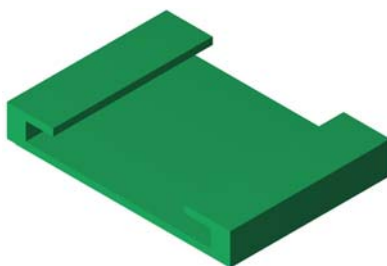

Type	Colour		Coil Length [m]	Bar Length [m]
C-12	G	Green	-	3, 6
	B	Black		
	W	White		

RP profile (for C-3 metallic profile)

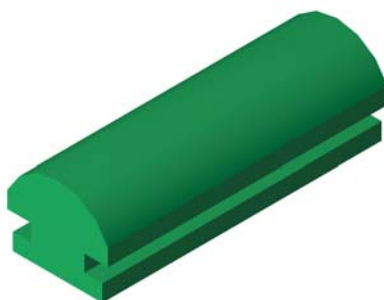

Type	Colour		Coil Length [m]	Bar Length [m]
RP	G	Green	-	3, 6
	B	Black		
	W	White		

PE Molecular weight for extruded profiles:

- White PE, Green PE = 4.000.000



- Black PE = 1.000.000

PE Molecular weight for machined profiles:

- White PE = 500.000



- Green PE, Black PE = 1.000.000

GL-2 profile





Type	Colour		Coil Length [m]	Bar Length [m]	s [mm]
GL-2 A	G	Green	50	3, 6	2,2
	B	Black			
	W	White			
GL-2	G	Green	50	3, 6	3,2
	B	Black			
	W	White			
GL-2 B	G	Green	50	3, 6	4,2
	B	Black			
	W	White			

GL-3 profile





Type	Colour		Coil Length [m]	Bar Length [m]
GL-3	G	Green	50	3, 6
	B	Black		
	W	White		

GL-1 profile





Type	Colour		Coil Length [m]	Bar Length [m]
GL-1	G	Green	50	3, 6
	B	Black		
	W	White		

GL-6 profile





Type	Colour		Coil Length [m]	Bar Length [m]
GL-6	G	Green	50	3, 6
	B	Black		
	W	White		

GL-7 profile





Type	Colour		Coil Length [m]	Bar Length [m]
GL-7	G	Green	50	3, 6
	B	Black		
	W	White		

GL-4 profile

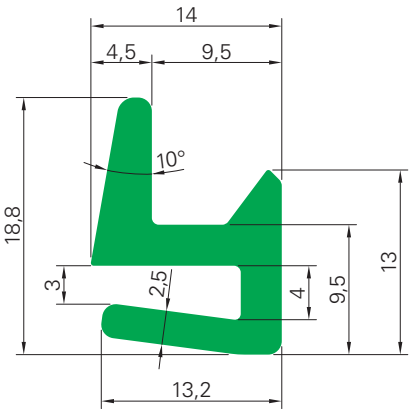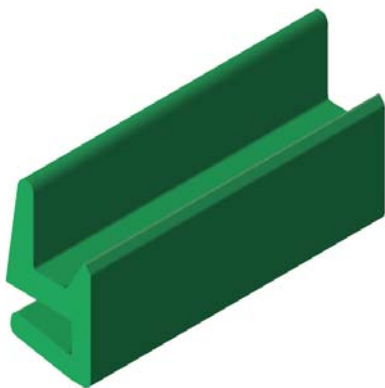



Type	Colour		Coil Length [m]	Bar Length [m]
GL-4	G	Green	-	3, 6
	B	Black		
	W	White		

GL-5 profile

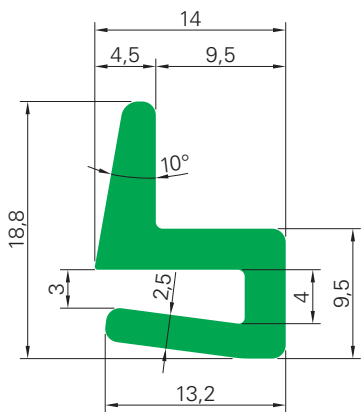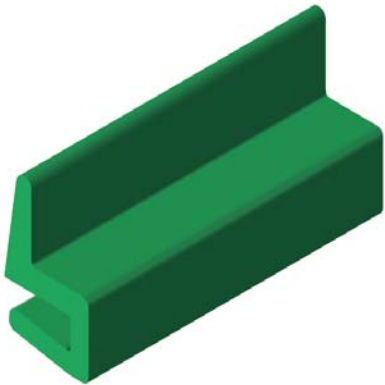

Type	Colour		Coil Length [m]	Bar Length [m]
GL-5	G	Green	-	3, 6
	B	Black		
	W	White		



GL-501 profile

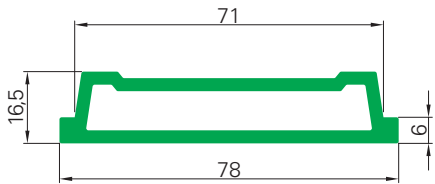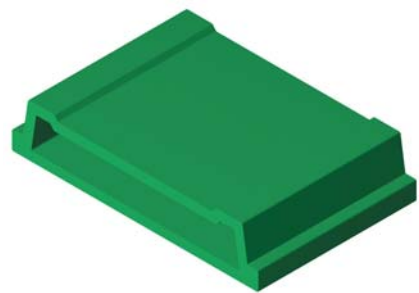

Type	Colour		Coil Length [m]	Bar Length [m]
GL-501	G	Green	-	3, 6
	B	Black		
	W	White		

PE Molecular weight: - White, Green, Black PE = 500.000




MGL-501 Clamps
(for GL-501 profiles)

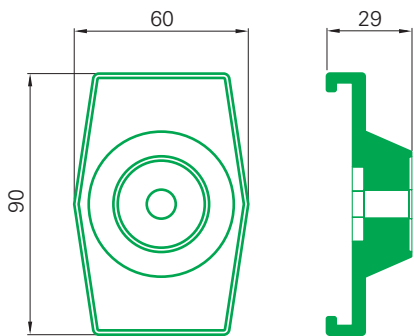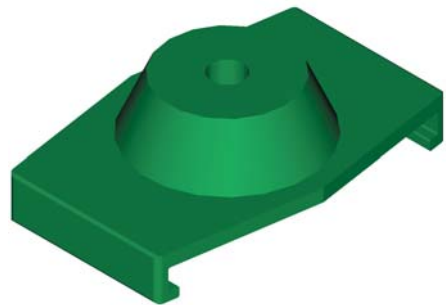

Type	Colour		N° clamps per box
MGL-501	B	Black	100



Type	Dod Dimensions	N° rods per box
Rods for MGL-501	Ø 12 mm, lenght 100mm	100
Rods for MGL-501	Ø 14 mm, lenght 100mm	100
Rods for MGL-501	Ø 16 mm, lenght 100mm	100

NGR E 32 straight neck profile
(extruded profiles)

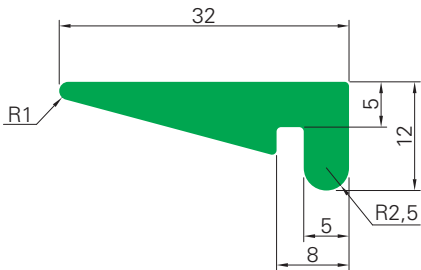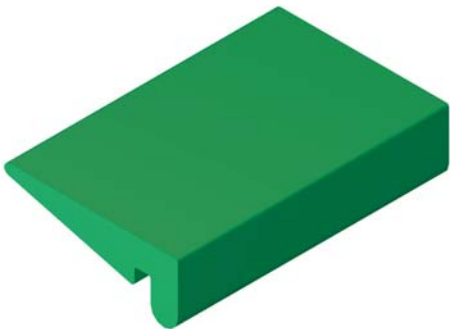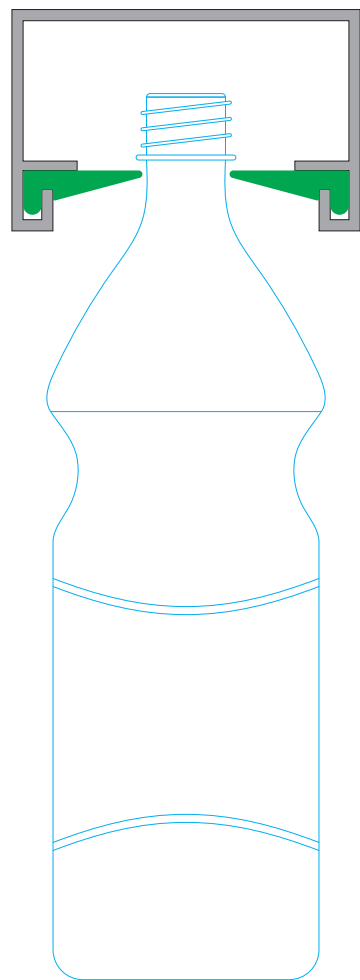



Type	Colour		Coil Length [m]	Bar Length [m]
NGR E 32	G	Green	-	3, 6
	B	Black		
	W	White		

NGR 32 straight neck profile (machined profile)

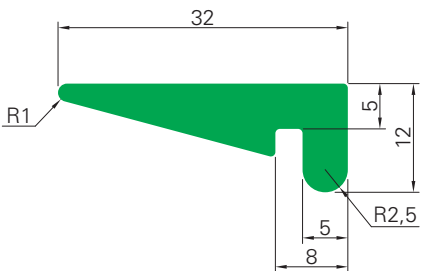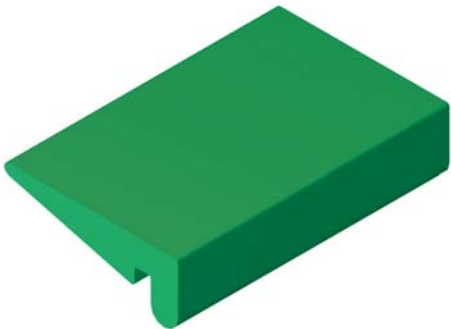



Type	Colour		Coil Length [m]	Bar Length [m]
NGR 32	B	Black	-	3

CNGR 32 corner neck profile (machined profile)

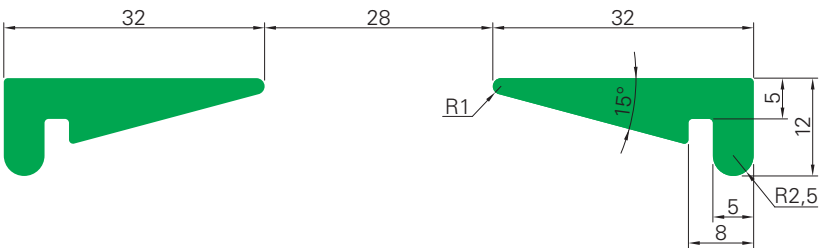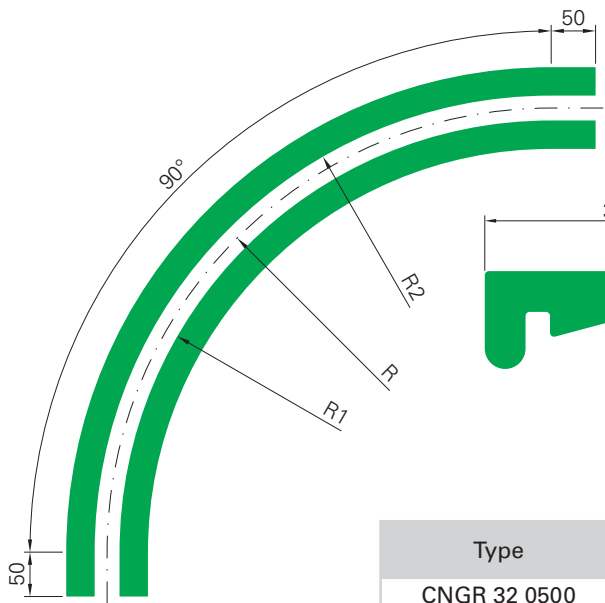

Type	Colour		R [mm]	R1 [mm]	R2 [mm]
CNGR 32 0500	B	Black	500	486	514
CNGR 32 0750			750	736	764
CNGR 32 1000			1000	986	1014

RP CI S 01
(stainless steel material: AISI 304)


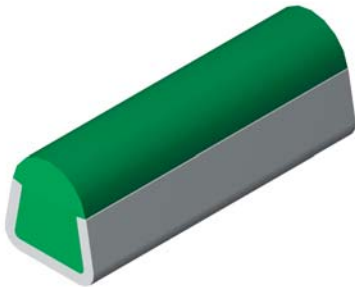


Type	Colour		Bars Length [m]
RP CI S 01	G	Green	3, 6
	B	Black	
	W	White	

RP CIE S 01
(stainless steel material: AISI 430)

Type	Colour		Bars Length [m]
RP CIE S 01	G	Green	3, 6
	B	Black	
	W	White	

RP CI S 02
(stainless steel material: AISI 304)


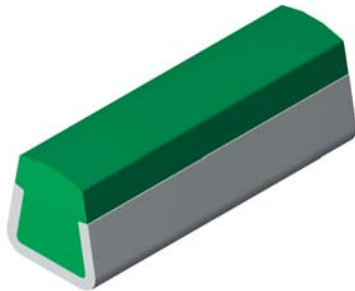


Type	Colour		Bars Length [m]
RP CI S 02	G	Green	3, 6
	B	Black	
	W	White	

RP CIE S 02
(stainless steel material: AISI 430)

Type	Colour		Bars Length [m]
RP CIE S 02	G	Green	3, 6
	B	Black	
	W	White	

RP CI S 03 (stainless steel material: AISI 304)


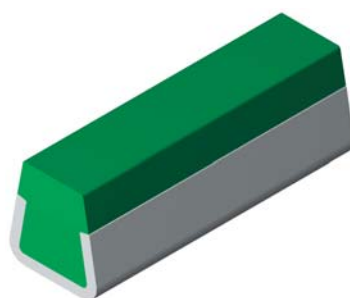


Type	Colour		Bars Length [m]
RP CI S 03	G	Green	3, 6
	B	Black	
	W	White	

RP CIE S 03 (stainless steel material: AISI 430)

Type	Colour		Bars Length [m]
RP CIE S 03	G	Green	3, 6
	B	Black	
	W	White	



RP CI S 04 (stainless steel material: AISI 304)

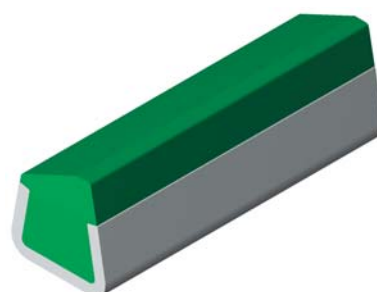

Type	Colour		Bars Length [m]
RP CI S 04	G	Green	3, 6
	B	Black	
	W	White	

RP CIE S 04 (stainless steel material: AISI 430)

Type	Colour		Bars Length [m]
RP CIE S 04	G	Green	3, 6
	B	Black	
	W	White	





MB T CI 317 M
(stainless steel material: AISI 304)

Type	Colour		Bars Length [m]
MB T CI 317 M	G	Green	3, 6
	B	Black	
	W	White	

MB T CIE 317 M
(stainless steel material: AISI 430)

Type	Colour		Bars Length [m]
MB T CIE 317 M	G	Green	3, 6
	B	Black	
	W	White	

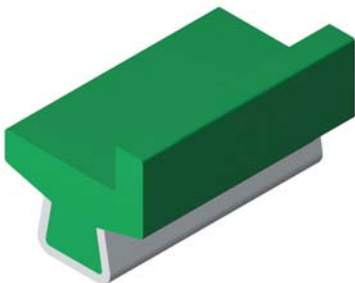



MB LT CI 317 M
(stainless steel material: AISI 304)

Type	Colour		Bars Length [m]
MB LT CI 317 M	G	Green	3, 6
	B	Black	
	W	White	

MB LT CIE 317 M
(stainless steel material: AISI 430)



Type	Colour		Bars Length [m]
MB LT CIE 317 M	G	Green	3, 6
	B	Black	
	W	White	

P20

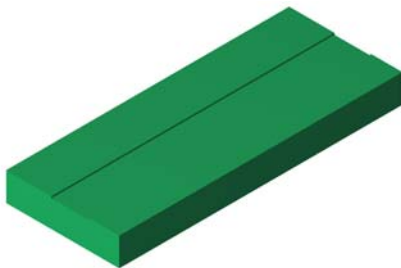



Type	Colour		Coil Length [m]	Bar Length [m]
P20	G	Green	50	-
	B	Black		
	W	White		

P40

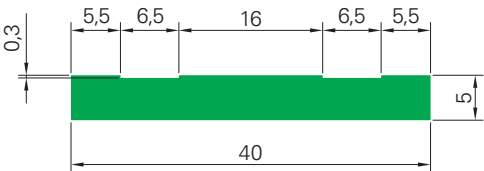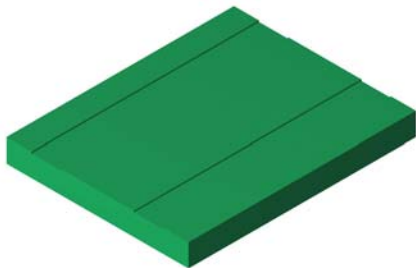



Type	Colour		Coil Length [m]	Bar Length [m]
P40	G	Green	50	-
	B	Black		
	W	White		

MB 01 profile





Type	Colour		Coil Length [m]	Bar Length [m]	s [mm]
MB 01-X	G	Green	–	3, 6	2,2
	B	Black			
	W	White			
MB 01-A	G	Green	–	3, 6	2,7
	B	Black			
	W	White			
MB 01-B	G	Green	–	3, 6	3,2
	B	Black			
	W	White			
MB 01-C	G	Green	–	3, 6	4,5
	B	Black			
	W	White			
MB 01-D	G	Green	–	3, 6	5,2
	B	Black			
	W	White			

MB 01T profile

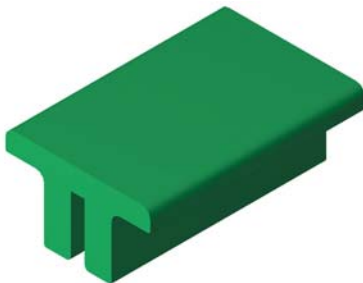



Type	Colour		Coil Length [m]	Bar Length [m]	s [mm]
MB 01T-X	G	Green	–	3, 6	2,2
	B	Black			
	W	White			
MB 01T-A	G	Green	–	3, 6	2,7
	B	Black			
	W	White			
MB 01T-B	G	Green	–	3, 6	3,2
	B	Black			
	W	White			
MB 01T-C	G	Green	–	3, 6	4,5
	B	Black			
	W	White			

MB 02 profile



Type	Colour		Coil Length [m]	Bar Length [m]	s [mm]
MB 02-X	G	Green	–	3, 6	2,2
	B	Black			
	W	White			
MB 02-A	G	Green	–	3, 6	2,7
	B	Black			
	W	White			
MB 02-B	G	Green	–	3, 6	3,2
	B	Black			
	W	White			
MB 02-C	G	Green	–	3, 6	4,5
	B	Black			
	W	White			
MB 02-D	G	Green	–	3, 6	5,2
	B	Black			
	W	White			

MB 02S profile

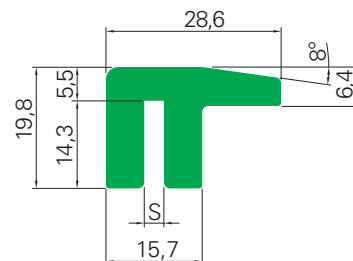



Type	Colour		Coil Length [m]	Bar Length [m]	s [mm]
MB 02S-X	G	Green	–	3, 6	2,2
	B	Black			
	W	White			
MB 02S-A	G	Green	–	3, 6	2,7
	B	Black			
	W	White			
MB 02S-B	G	Green	–	3, 6	3,2
	B	Black			
	W	White			
MB 02S-C	G	Green	–	3, 6	4,5
	B	Black			
	W	White			
MB 02S-D	G	Green	–	3, 6	5,2
	B	Black			
	W	White			

PE Molecular weight:

- White PE, Green PE = 4.000.000



- Black PE = 1.000.000

MB 02U profile

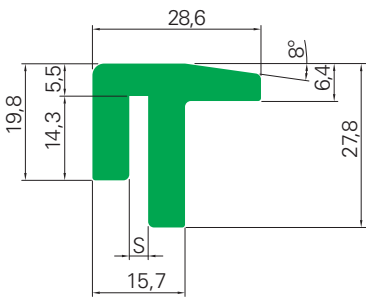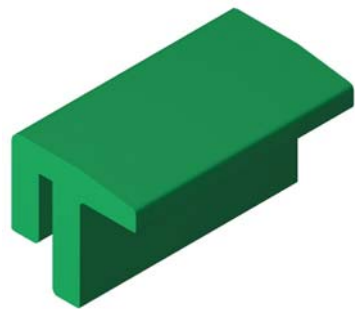

Type	Colour		Coil Length [m]	Bar Length [m]	s [mm]
MB 02U-X	G	Green	-	3, 6	2,2
	B	Black			
	W	White			
MB 02U-A	G	Green	-	3, 6	2,7
	B	Black			
	W	White			
MB 02U-B	G	Green	-	3, 6	3,2
	B	Black			
	W	White			
MB 02U-C	G	Green	-	3, 6	4,5
	B	Black			
	W	White			

SP2 cage bars
for spiral applications
(machined profile)

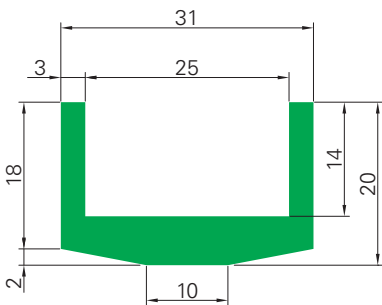
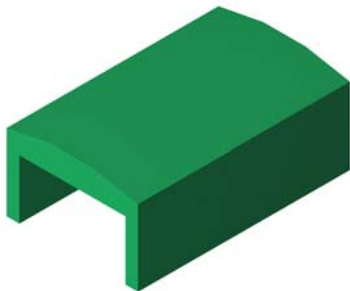


Type	Colour		Coil Length [m]	Bar Length [m]
SP2	G	Green	-	3, 6
	B	Black		
	W	White		

PE Molecular weight for extruded profiles:
PE Molecular weight for machined profiles:



- White PE, Green PE = 4.000.000
- White PE = 4.000.000
- Black PE = 1.000.000
- Green PE, Black PE = 1.000.000

GC 01 for straight chain C3200 (machined profile)

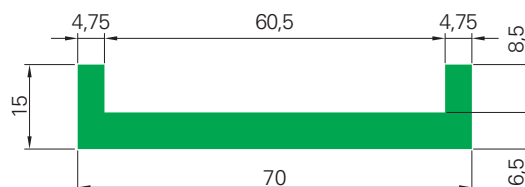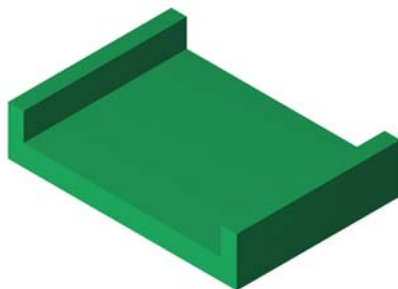


Type	Colour		Coil Length [m]	Bar Length [m]
GC 01	G	Green	-	3
	B	Black		
	W	White		

GC 02 for radius chain C3210 (machined profile)

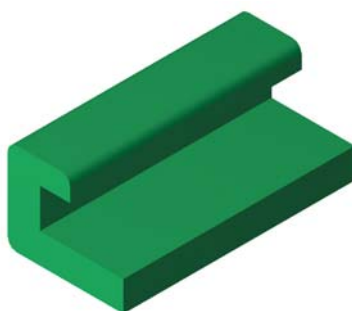

Type	Colour		Coil Length [m]	Bar Length [m]
GC 02	G	Green	-	3
	B	Black		
	W	White		


HabiPLAST® tapes in PE

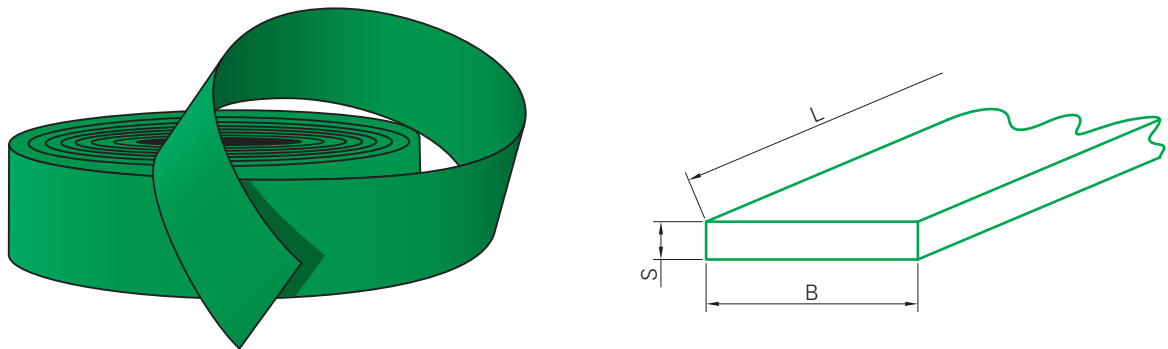

HabiPLAST® tapes in PE													
Tapes Thickness s [mm]	Coil Length L [m]	Tape Width B [mm]											
		10	20	25	30	35	40	45	50	60	70	80	100
2	50	●	●	●	●	●	●	●	●	●	●	●	●
3	50	●	●	●	●	●	●	●	●	●	●	●	●
4	50	●	●	●	●	●	●	●	●	●	●	●	●
5	25	●	●	●	●	●	●	●	●	●	●	●	●


- PE tapes are also available width 280 mm (thickness 2 mm).
- PE tapes are also available width 260 mm (thickness 3 mm).
- PE tapes are also available width 240 mm (thickness 4 mm).
- PE tapes are also available width 220 mm (thickness 5 mm).
- In the order specify the colour code:
 - B** for Black
 - G** for Green
 - W** for White
- Tapes are available only in entire coils.

WS 01 Wearstrip Kit

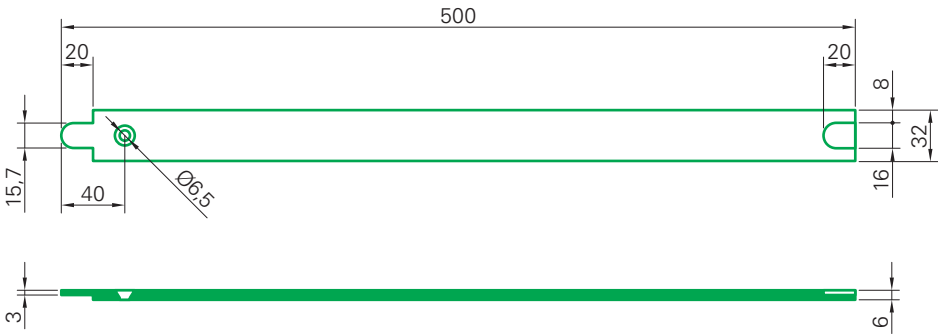


Type	Material	Colour	N° of wearstrip per box [pcs]
WS 01 kit	HabiPLAST®- HEM	White	100
	Habilon - PA6		
	Habital - POM		

- WS 01 wearstrips are supplied with DIN963 - M6x30 screws and screw nuts

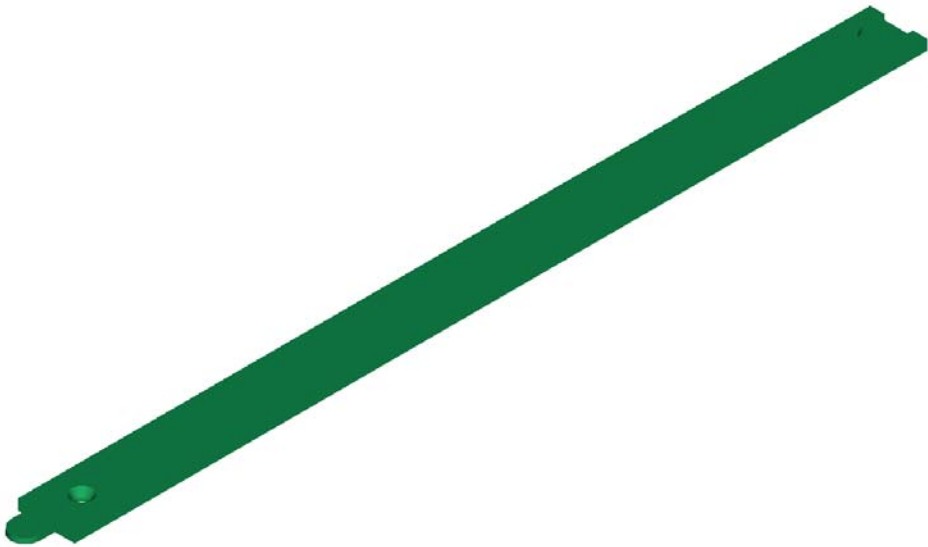

Type	Material	Colour	N° per box [pcs]
Screw M6x30	Habilon	White	100
Screw Nut M6x30	Habital	White	100

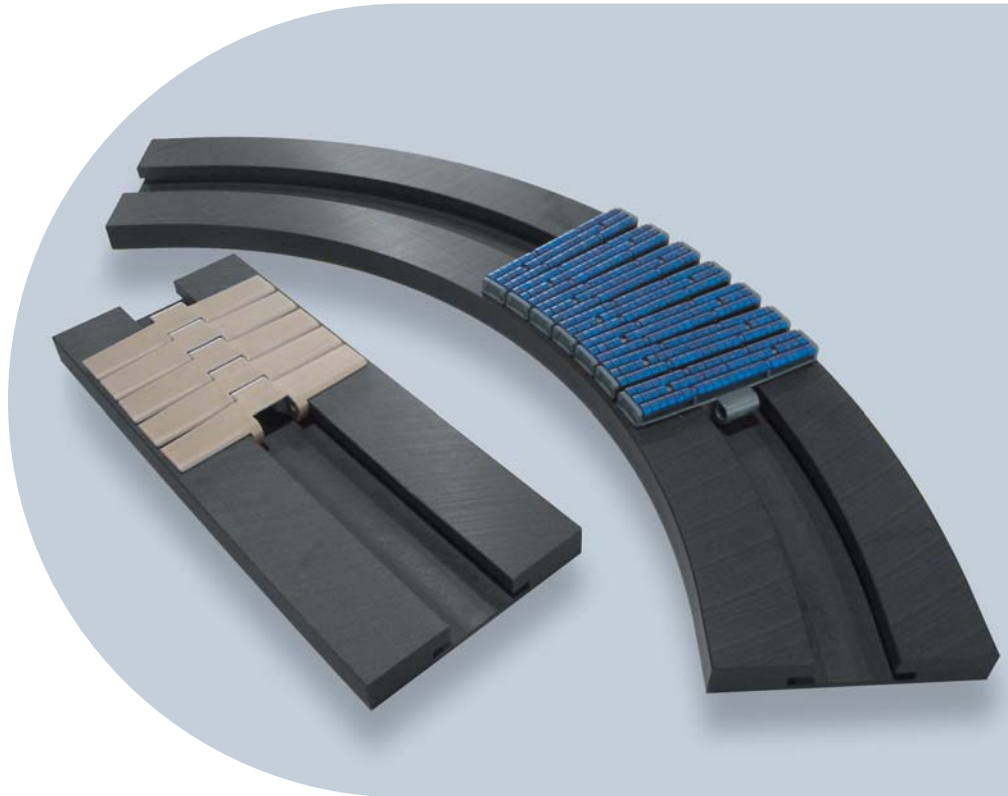




Corner and straight tracks

HabiPLAST® guides are used above all in bottling industry as complement of our extruded profiles. Habasit can realize curves by CNC, machining with angles and dimensions according to customer's specifications. Standard material is UHR/Black but other materials and colours are available (see pag. 6/7).

The main advantages of HabiPLAST® guides are:

- Excellent sliding of the chain
- Great wear resistance
- Low noise
- Good resistance against chemicals
- Easy and quick assembly
- Lighter conveyor frame

Straight tracks

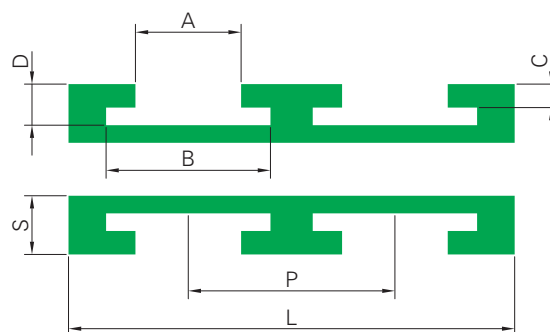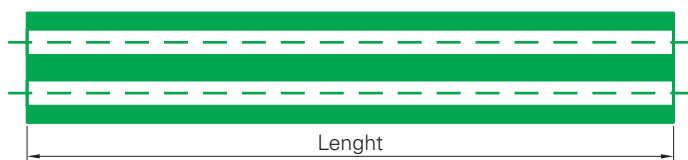
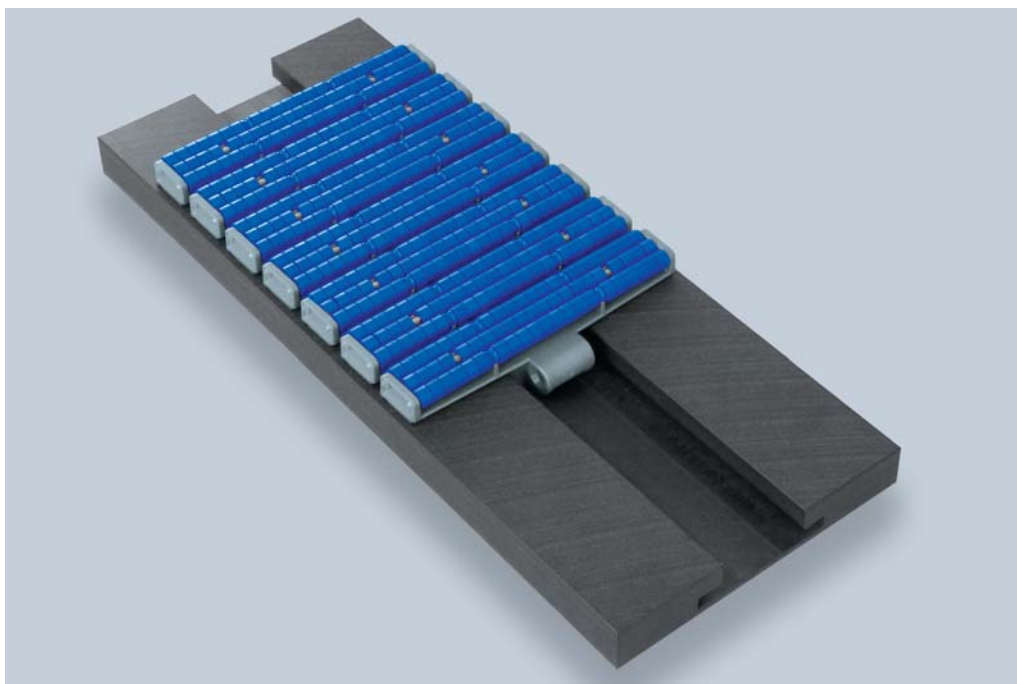


Type	L [mm]	N° ways	P [mm]	Length	A [mm]	B [mm]	C [mm]	D [mm]	S [mm]	Chains
ST880K325T1	100	1		2000	45	70	10	17,5	25	879 TAB K325 880 TAB K325
ST880K325T2	190	2	88							
ST880K325T3	280	3	88							
ST880K450T1	130	1		2000	45	70	10	17,5	25	879 TAB K450 880 TAB K450
ST880K450T2	250	2	120							
ST882K450T1	130	1		2000	58	90	15	24	30	882 TAB K450
ST882K450T2	250	2	120							
ST882K750T1	200	1		2000	58	90	15	24	30	882 TAB K750
ST882K750T2	396	2	196							
ST882K1000T1	270	1		2000	58	90	15	24	30	882 TAB K1000
ST882K1000T2	530	2	260							
ST882K1200T1	320	1		2000	58	90	15	24	30	882 TAB K1200
ST882K1200T2	630	2	310							

• Material: HabiPLAST® UHR/S = Polyethylene high molecular weight (1.000.000)

Color: Black

Corner tracks

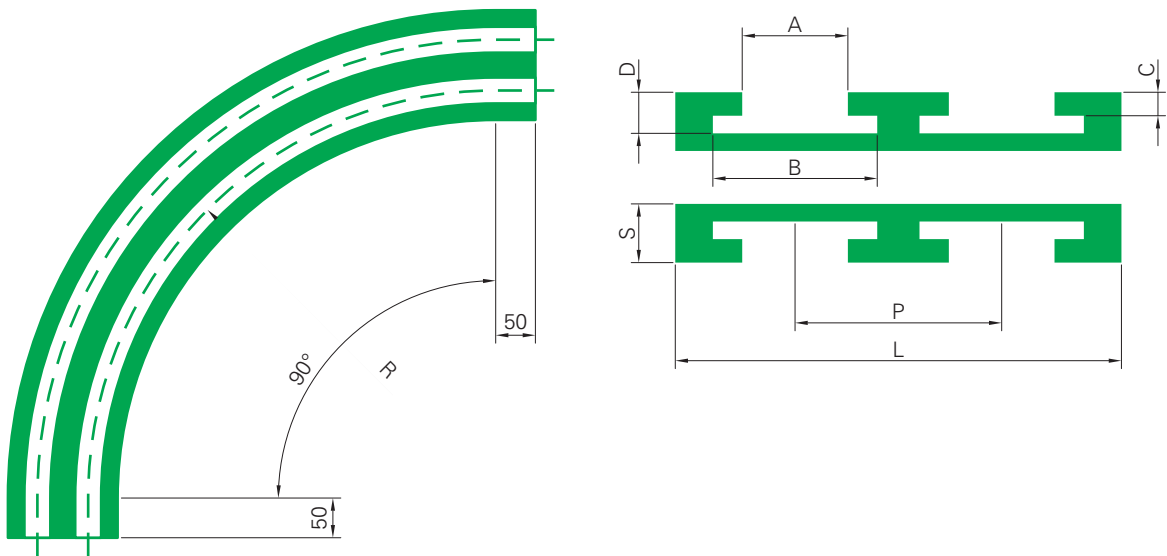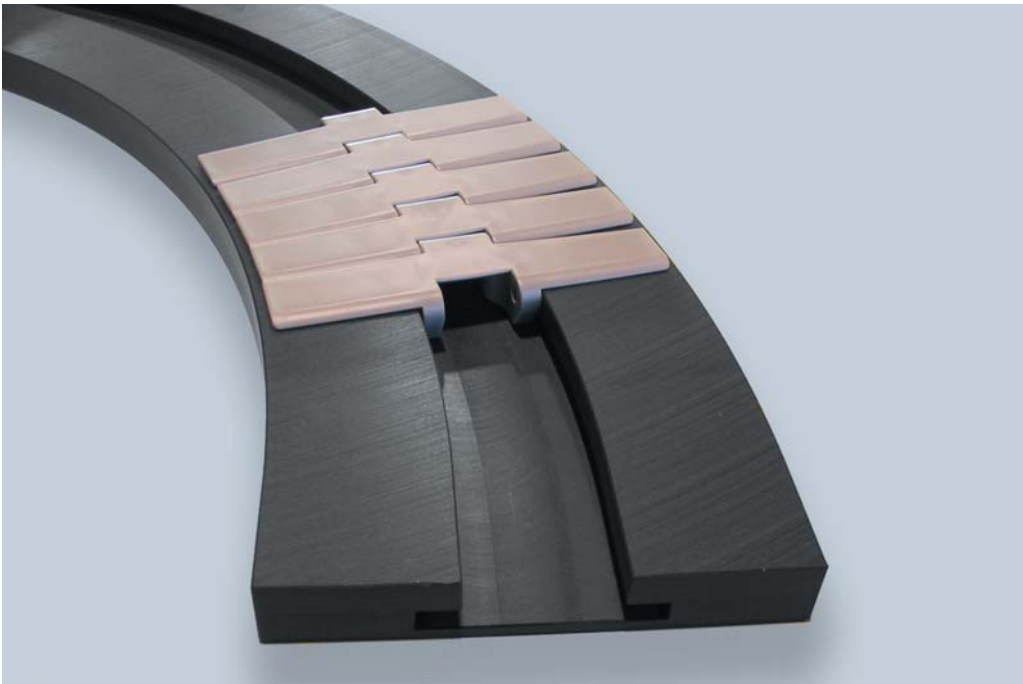


- Material: HabipLAST® UHR/S = Polyethylene high molecular weight (1.000.000)

Color: Black

Corner tracks

Type	L [mm]	N° ways	P [mm]	R [mm]	A [mm]	B [mm]	C [mm]	D [mm]	S [mm]	Chains
CT880K325R500T1	100	1		500	45	70	10	17,5	25	879 TAB K325 880 TAB K325
CT880K325R500T2	190	2	88							
CT880K325R500T3	280	3	88							
CT880K325R610T1	100	1		610						
CT880K325R610T2	190	2	88							
CT880K325R610T3	280	3	88							
CT880K325R800T1	100	1		800						
CT880K325R800T2	190	2	88							
CT880K325R800T3	280	3	88							
CT880K325R1000T1	100	1		1000						
CT880K325R1000T2	190	2	88							
CT880K325R1000T3	280	3	88							
CT880K450R500T1	130	1		500	45	70	10	17,5	25	879 TAB K450 880 TAB K450
CT880K450R500T2	250	2	120							
CT880K450R610T1	130	1		610						
CT880K450R610T2	250	2	120							
CT880K450R800T1	130	1		800						
CT880K450R800T2	250	2	120							
CT880K450R1000T1	130	1		1000						
CT880K450R1000T2	250	2	120							
CT882K450R610T1	130	1		610	58	90	15	24	30	882 TAB K450
CT882K450R610T2	250	2	120							
CT882K450R800T1	130	1		800						
CT882K450R800T2	250	2	120							
CT882K450R1000T1	130	1		1000						
CT882K450R1000T2	250	2	120							
CT882K750R610T1	200	1		610	58	90	15	24	30	882 TAB K750
CT882K750R610T2	396	2	196							
CT882K750R800T1	200	1		800						
CT882K750R800T2	396	2	196							
CT882K750R1000T1	200	1		1000						
CT882K750R1000T2	396	2	196							
CT882K1000R610T1	270	1		610	58	90	15	24	30	882 TAB K1000
CT882K1000R610T2	530	2	260							
CT882K1000R800T1	270	1		800						
CT882K1000R800T2	530	2	260							
CT882K1000R1000T1	270	1		1000						
CT882K1000R1000T2	530	2	260							
CT882K1200R610T1	320	1		610	58	90	15	24	30	882 TAB K1200
CT882K1200R610T2	630	2	310							
CT882K1200R800T1	320	1		800						
CT882K1200R800T2	630	2	310							
CT882K1200R1000T1	320	1		1000						
CT882K1200R1000T2	630	2	310							

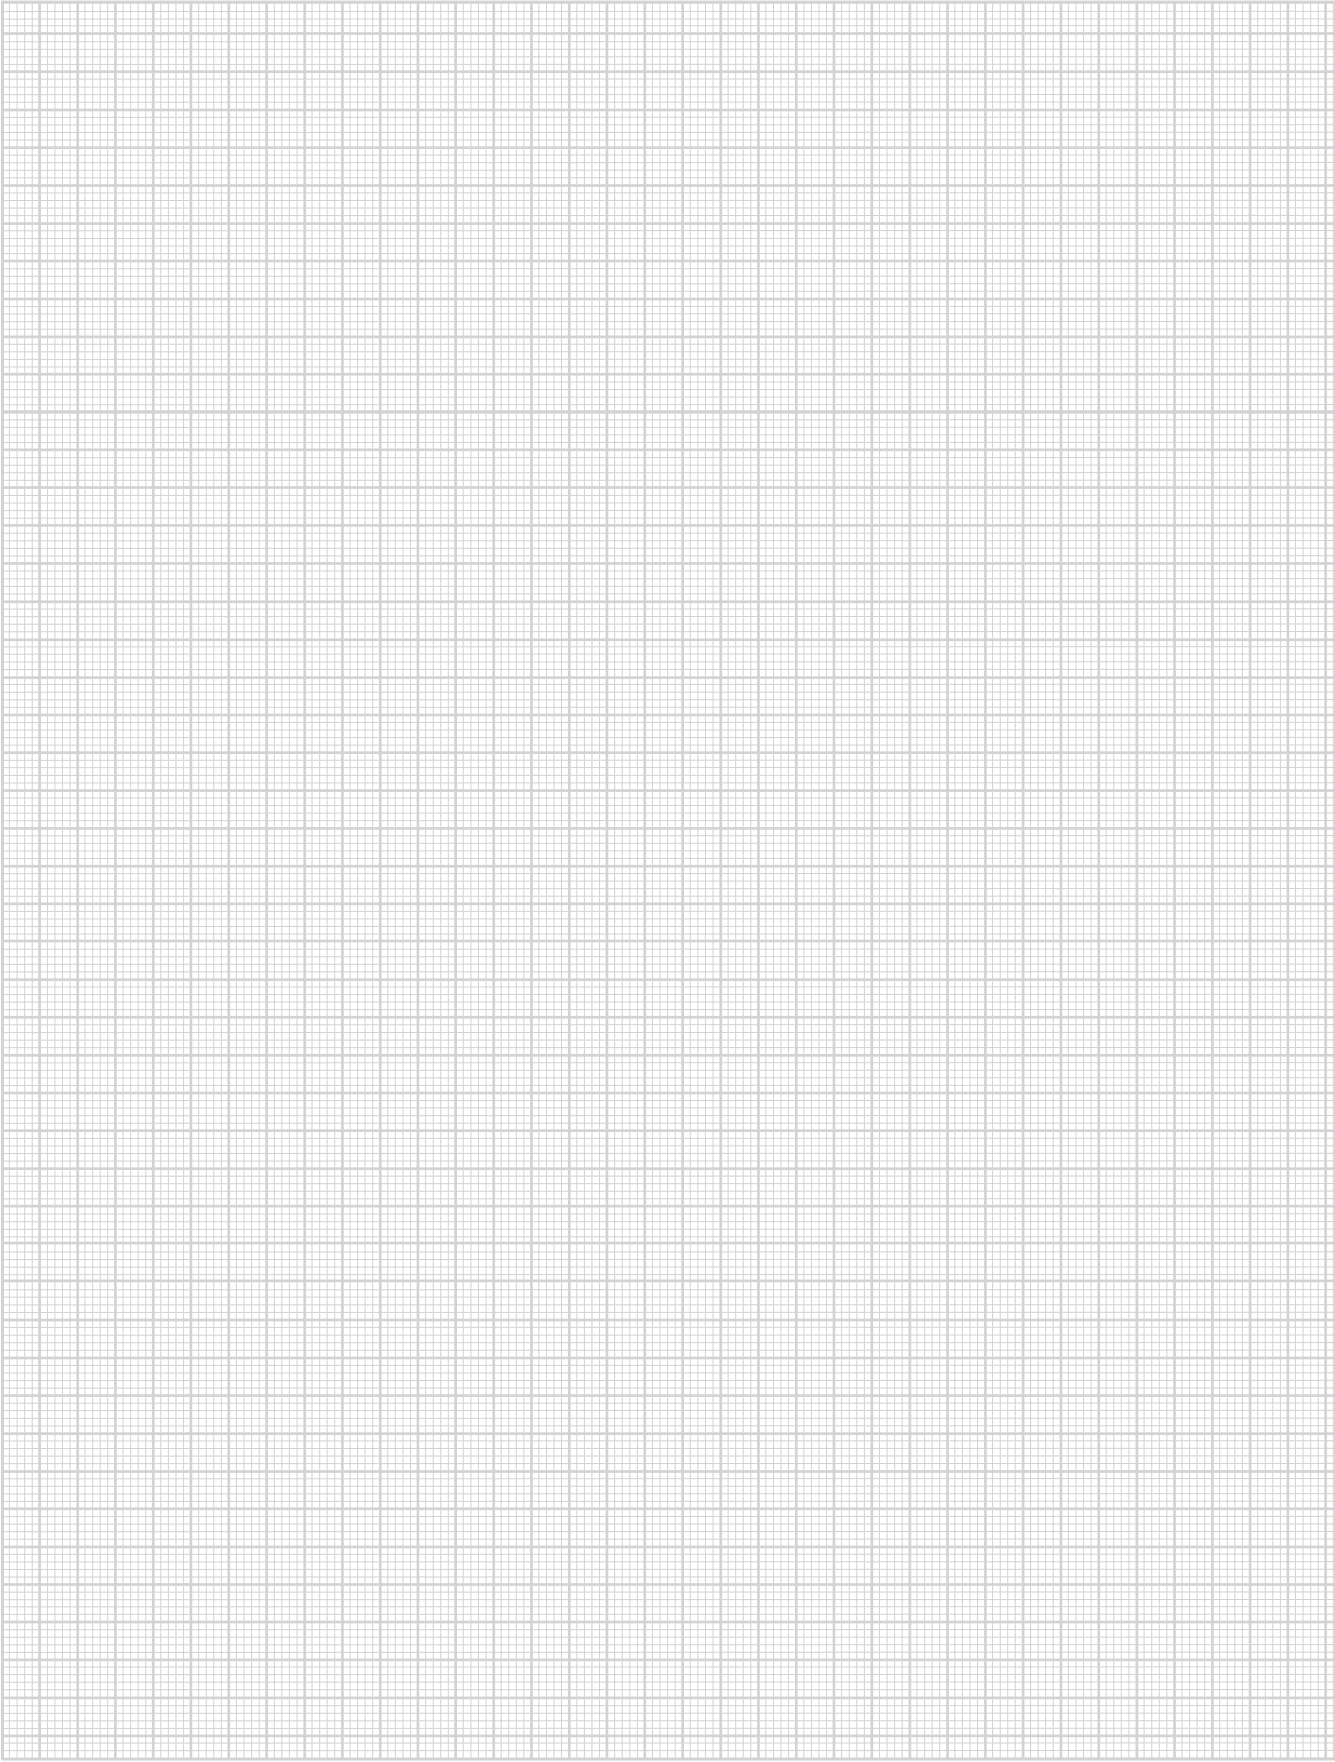





Guides for HabaSYNC® timing belts

Habasit has developed HabaSYNC® timing belts. These high quality polyurethane timing belts are used in conveying and linear movement applications specially where motion control, product placement, component positioning and synchronization are essential for optimum performance.

The main advantages of HabiPLAST® guides are:

- High chemical resistance
- Wear and corrosion resistance
- Low noise

HabiPLAST® is available to fit standard HabaSYNC® belts and can be supplied with or without metallic inserts. Standard material for HabaSYNC® guides is UHR/G green, different material are available on demand (see pages 6/7).

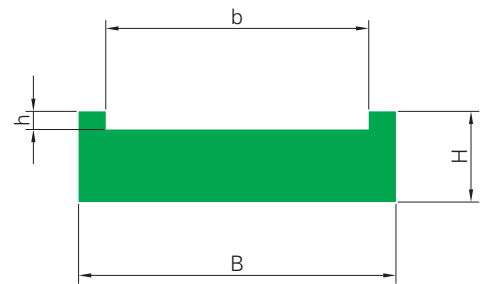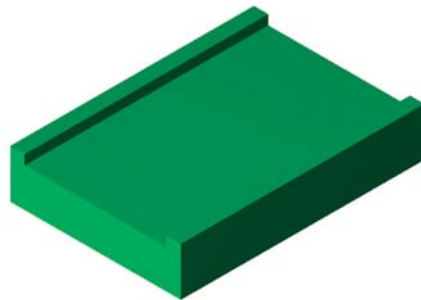

Guide Type	Belt Type	B [mm]	H [mm]	b [mm]	h [mm]
F T5 16	16 T5	25	10	17	1,8
F T5 25	25 T5	34	10	26	1,8
F T5 32	32 T5	41	10	33	1,8

Guide Type	Belt Type	B [mm]	H [mm]	b [mm]	h [mm]
F T10 16	16 T10	25	15	17	3,8
F T10 25	25 T10	34	15	26	3,8
F T10 32	32 T10	41	15	33	3,8
F T10 50	50 T10	59	15	51	3,8
F T10 75	75 T10	84	15	76	3,8
F T10 100	100 T10	109	15	101	3,8



Guide Type	Belt Type	B [mm]	H [mm]	b [mm]	h [mm]
F T20 25	25 T20	34	20	26	7
F T20 32	32 T20	41	20	33	7
F T20 50	50 T20	59	20	51	7

Guide Type	Belt Type	B [mm]	H [mm]	b [mm]	h [mm]
F AT5 16	16 AT5	25	10	17	2,2
F AT5 25	25 AT5	34	10	26	2,2
F AT5 32	32 AT5	41	10	33	2,2

Guide Type	Belt Type	B [mm]	H [mm]	b [mm]	h [mm]
F AT10 16	16 AT10	25	15	17	3,8
F AT10 25	25 AT10	34	15	26	3,8
F AT10 32	32 AT10	41	15	33	3,8
F AT10 50	50 AT10	59	15	51	3,8
F AT10 75	75 AT10	84	15	76	3,8
F AT10 100	100 AT10	109	15	101	3,8

Guide Type	Belt Type	B [mm]	H [mm]	b [mm]	h [mm]
F AT20 25	25 AT20	34	20	26	7
F AT20 32	32 AT20	41	20	33	7
F AT20 50	50 AT20	59	20	51	7

- Standard length is 3 m.

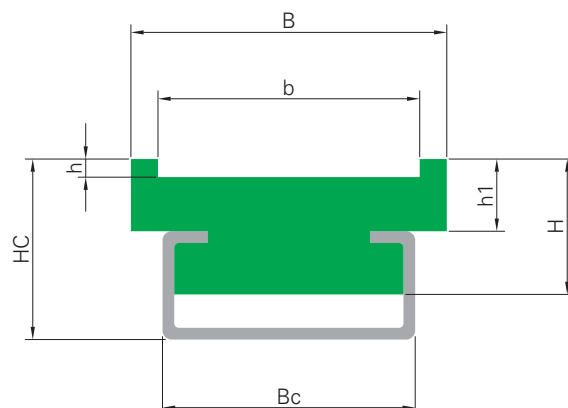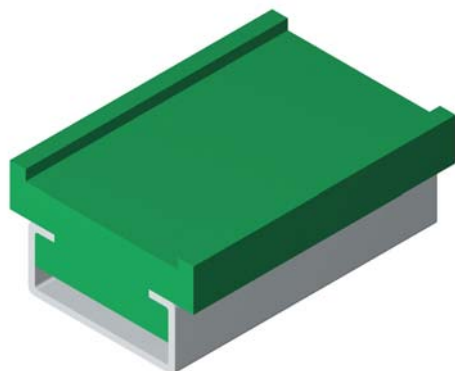

Guide Type	Belt Type	B [mm]	Bc [mm]	b [mm]	Hc [mm]	H [mm]	h1 [mm]	h [mm]	Metallic Profile Type
FC T5 16	16 T5	25	28	17	19	15	7	1,8	C-5
FC T5 25	25 T5	34	28	26	19	15	7	1,8	C-5
FC T5 32	32 T5	41	38	33	25	20	7	1,8	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	b [mm]	Hc [mm]	H [mm]	h1 [mm]	h [mm]	Metallic Profile Type
FC T10 16	16 T10	25	28	17	21	17	9	3,8	C-5
FC T10 25	25 T10	34	28	26	21	17	9	3,8	C-5
FC T10 32	32 T10	41	38	33	27	22	9	3,8	C-9
FC T10 50	50 T10	59	38	51	27	22	9	3,8	C-9



Guide Type	Belt Type	B [mm]	Bc [mm]	b [mm]	Hc [mm]	H [mm]	h1 [mm]	h [mm]	Metallic Profile Type
FC T20 25	25 T20	34	28	26	24	20	12	7	C-5
FC T20 32	32 T20	41	38	33	30	25	12	7	C-9
FC T20 50	50 T20	59	38	51	30	25	12	7	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	b [mm]	Hc [mm]	H [mm]	h1 [mm]	h [mm]	Metallic Profile Type
FC AT5 16	16 AT5	25	28	17	19	15	7	2,2	C-5
FC AT5 25	25 AT5	34	28	26	19	15	7	2,2	C-5
FC AT5 32	32 AT5	41	38	33	25	20	7	2,2	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	b [mm]	Hc [mm]	H [mm]	h1 [mm]	h [mm]	Metallic Profile Type
FC AT10 16	16 AT10	25	28	17	21	17	9	3,8	C-5
FC AT10 25	25 AT10	34	28	26	21	17	9	3,8	C-5
FC AT10 32	32 AT10	41	38	33	27	22	9	3,8	C-9
FC AT10 50	50 AT10	59	38	51	27	22	9	3,8	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	b [mm]	Hc [mm]	H [mm]	h1 [mm]	h [mm]	Metallic Profile Type
FC AT20 25	25 AT20	34	28	26	24	20	12	7	C-5
FC AT20 32	32 AT20	41	38	33	30	25	12	7	C-9
FC AT20 50	50 AT20	59	38	51	30	25	12	7	C-9

- Standard length is 3 m.

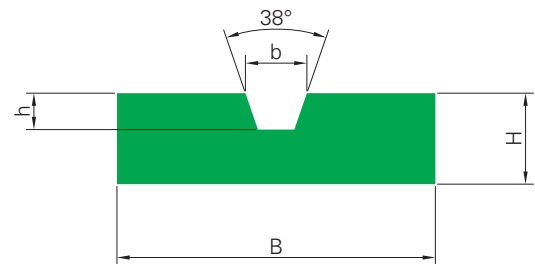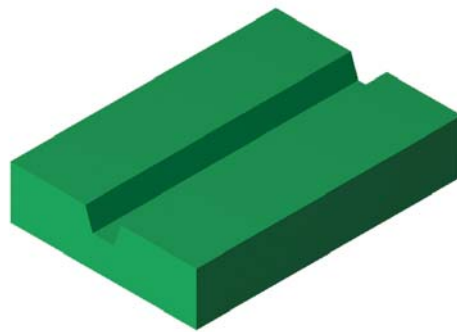

Guide Type	Belt Type	B [mm]	H [mm]	Shape G6		Shape G10	
				h [mm]	b [mm]	h [mm]	b [mm]
FV TG5 25	25 TG5	34	10	4	6	4,5	10
FV TG5 32	32 TG5	41	10	4	6	4,5	10

Guide Type	Belt Type	B [mm]	H [mm]	Shape G6		Shape G10	
				h [mm]	b [mm]	h [mm]	b [mm]
FV TG10 25	25 TG10	34	10	4	6	4,5	10
FV TG10 32	32 TG10	41	10	4	6	4,5	10
FV TG10 50	50 TG10	59	15	4	6	4,5	10
FV TG10 75	75 TG10	84	15	4	6	4,5	10
FV TG10 100	100 TG10	109	15	4	6	4,5	10



Guide Type	Belt Type	B [mm]	H [mm]	Shape G10		Shape G13	
				h [mm]	b [mm]	h [mm]	b [mm]
FV TG20 25	25 TG20	34	20	4,5	10	3	13
FV TG20 32	32 TG20	41	20	4,5	10	3	13
FV TG20 50	50 TG20	59	20	4,5	10	3	13

Guide Type	Belt Type	B [mm]	H [mm]	Shape G6		Shape G10	
				h [mm]	b [mm]	h [mm]	b [mm]
FV ATG5 25	25 ATG5	34	10	4	6	4,5	10
FV ATG5 32	32 ATG5	41	10	4	6	4,5	10

Guide Type	Belt Type	B [mm]	H [mm]	Shape G6		Shape G10	
				h [mm]	b [mm]	h [mm]	b [mm]
FV ATG10 25	25 ATG10	34	10	4	6	4,5	10
FV ATG10 32	32 ATG10	41	10	4	6	4,5	10
FV ATG10 50	50 ATG10	59	15	4	6	4,5	10
FV ATG10 75	75 ATG10	84	15	4	6	4,5	10
FV ATG10 100	100 ATG10	109	15	4	6	4,5	10

Guide Type	Belt Type	B [mm]	H [mm]	Shape G10		Shape G13	
				h [mm]	b [mm]	h [mm]	b [mm]
FV ATG20 25	25 ATG20	34	20	4,5	10	3	13
FV ATG20 32	32 ATG20	41	20	4,5	10	3	13
FV ATG20 50	50 ATG20	59	20	4,5	10	3	13

- Standard length is 3 m.

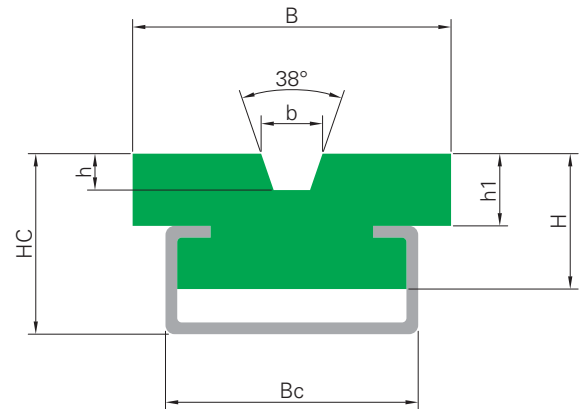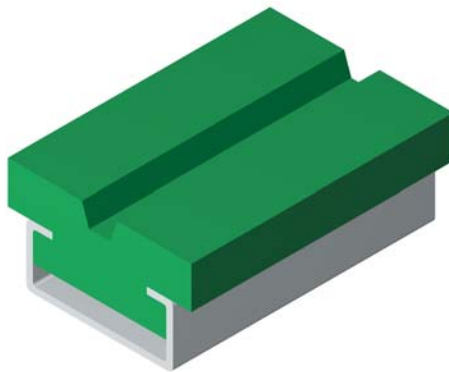

Guide Type	Belt Type	B [mm]	Bc [mm]	Hc [mm]	H [mm]	h1 [mm]	Shape G6		Shape G10		Metallic Profile Type
							h [mm]	b [mm]	h [mm]	b [mm]	
FCV TG5 25	25 TG5	34	28	19	15	7	4	6	4,5	10	C-5
FCV TG5 32	32 TG5	41	38	25	20	7	4	6	4,5	10	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	Hc [mm]	H [mm]	h1 [mm]	Shape G6		Shape G10		Metallic Profile Type
							h [mm]	b [mm]	h [mm]	b [mm]	
FCV TG10 25	25 TG10	34	28	21	17	9	4	6	4,5	10	C-5
FCV TG10 32	32 TG10	41	38	27	22	9	4	6	4,5	10	C-9
FCV TG10 50	50 TG10	59	38	27	22	9	4	6	4,5	10	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	Hc [mm]	H [mm]	h1 [mm]	Shape G10		Shape G13		Metallic Profile Type
							h [mm]	b [mm]	h [mm]	b [mm]	
FCV TG20 25	25 TG20	34	28	24	20	12	4,5	10	3	13	C-5
FCV TG20 32	32 TG20	41	38	30	25	12	4,5	10	3	13	C-9
FCV TG20 50	50 TG20	59	38	30	25	12	4,5	10	3	13	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	Hc [mm]	H [mm]	h1 [mm]	Shape G6		Shape G10		Metallic Profile Type
							h [mm]	b [mm]	h [mm]	b [mm]	
FCV ATG5 25	25 ATG5	34	28	19	15	7	4	6	4,5	10	C-5
FCV ATG5 32	32 ATG5	41	38	25	20	7	4	6	4,5	10	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	Hc [mm]	H [mm]	h1 [mm]	Shape G6		Shape G10		Metallic Profile Type
							h [mm]	b [mm]	h [mm]	b [mm]	
FCV ATG10 25	25 ATG10	34	28	21	17	9	4	6	4,5	10	C-5
FCV ATG10 32	32 ATG10	41	38	27	22	9	4	6	4,5	10	C-9
FCV ATG10 50	50 ATG10	59	38	27	22	9	4	6	4,5	10	C-9

Guide Type	Belt Type	B [mm]	Bc [mm]	Hc [mm]	H [mm]	h1 [mm]	Shape G10		Shape G13		Metallic Profile Type
							h [mm]	b [mm]	h [mm]	b [mm]	
FCV ATG20 25	25 ATG20	34	28	24	20	12	4,5	10	3	13	C-5
FCV ATG20 32	32 ATG20	41	38	30	25	12	4,5	10	3	13	C-9
FCV ATG20 50	50 ATG20	59	38	30	25	12	4,5	10	3	13	C-9

- Standard length is 3 m.

Our comprehensive range of services is an integral part of Habasit's solution approach. We are committed partners to our customers, and we consider the sharing of knowledge and the provision of support to be essential to our task.

Designing the future

Our engineering department uses the most advanced CAD/CAM systems. We can machine parts on the basis of customer's drawings, quickly and always with excellent quality.



CNC machining tools

HabiPLAST® plants are equipped with the state of the art machining tools. All the machines are connected by LAN and the production flow is checked in real time, in order to provide always deliveries on time.



Short lead times

Quick deliveries are guaranteed also by HabiPLAST® stocks of standard materials. Chain guides and extruded profiles are always available in our warehouse.



Services at your hand

We are where you are, and our dedicated staff is always available for your needs.



At Habasit, we listen to our customers, innovate continuously and deliver reliable solutions to meet your every need.

Customers come first

At Habasit we understand that our success depends on your success. Which is why we offer solutions, not just products; partnership, not just sales.

Since our foundation in 1946, Habasit has brought this understanding of customer needs to life every day and for every application. That's why we're the No. 1 in belting today. Worldwide.



Committed to innovation

Habasit is strongly committed to the continuous development of innovative, value-added solutions. Over 3% of our staff is dedicated exclusively to R&D, and our annual investment in this area exceeds 5% of turnover.



Certified for quality

We deliver the highest quality standards not only in our products and solutions, but also in our employees' daily work processes. Habasit is certified according to ISO 9001:2000.




Worldwide leading product range

Habasit offers the largest selection of belting, conveying, processing and complementary products in the industry. Our response to any request is nothing less than a specific, tailor-made solution.

A selection of our product ranges:



HabaFLOW®
Fabric based
conveyor and
processing belts



HabasitLINK®
Plastic modular
belts



HabaDRIVE®
Power
transmission
belts



HabaSYNC®
Timing belts



HabaCHAIN®
Chains (slat and
conveyor chains)



HabiPLAST®
Profiles
Guides
Wear strips



Machine tapes



Seamless belts



Round belts



Fabrication tools
(joining tools)



Gear reducers
Gearmotors
Motion control



Electric motors

Worldwide support

Our extensive organization is ready to support you anywhere in the world. Engineering and emergency assistance, quotes and order status are just a phone call away. Wherever you are. Whenever you need us.

For additional information please visit:
www.habasit.com

Austria

Habasit GmbH, Wien
Phone: +43 1 690 66
www.habasit.at

Belgium

Habasit Belgium N.V., Zaventem
Phone: +32 2 725 04 30
www.habasit.be

Canada

Habasit Canada Ltd., Oakville
Phone: +1 905 827 4131
www.habasit.ca

China

Habasit East Asia Ltd., Hong Kong
Phone: +852 2145 01 50
www.habasit.com.hk

Habasit (Shanghai) Co., Ltd.

Shanghai
Phone: +8621 3417 1228
Phone: +8621 3417 1218
www.habasit.com.hk

Czech Republic

Habasit Bohemia spol. s.r.o., Brno
Phone: +4205 41 421 651
www.habasit.cz

France

Habasit France S.A.S., Mulhouse
Phone: +33 389 33 89 03
www.habasit.fr

Germany

Habasit Rossi GmbH,
Eppertshausen
Phone: +49 6071 969 0
www.habasitrossi.de

Hungary

Habasit Hungária Kft., Esztergom
Phone: +36 33 510 610
www.habasit.hu

India

Habasit-lakoka Pvt. Ltd., Coimbatore
Phone: +91 422 262 78 79
www.habasitiakoka.com

Italy

Habasit Italiana SpA
Customer Care:
Phone: 199 199 333
For int. calls: +39 0438 911444
www.habasit.it

Japan

Habasit Nippon Co. Ltd., Yokohama
Phone: +81 45 476 03 71
www.habasit.co.jp

Latvia

Habasit Baltic SIA, Daugavpils
Phone: +371 54 074 88
www.habasit.lv

Netherlands

Habasit Netherlands BV, Nijkerk
Phone: +31 33 24 72 030
www.habasit.nl

New Zealand

Habasit Australasia Ltd., Hornby
Phone: +64 3348 5600
www.habasit.co.nz

Norway

Habasit Norge A/S, Oslo
Phone: +47 81 55 84 58
www.habasit.no

Poland

Habasit Polska Sp. z o.o.,
Dębowa Górnicza,
Phone: +48 32 639 02 40
www.habasit.pl

Romania

Habasit Import/Export Romania SRL,
Bucuresti, Phone: +40 21 323 95 65
www.habasit.ro

Russia

OOO Habasit Ltd., St. Petersburg
Phone: +7 818 365 64 62
www.habasit.ru

Singapore

Habasit Far East Pte Ltd., Singapore
Phone: +65 6862 55 66
www.habasit.com.sg

Spain

Habasit Hispanica S.A.,
Barberà del Vallès
Phone: +34 93 719 19 12
www.habasit.com

Sweden

Habasit AB, Hindas
Phone: +46 301 226 00
www.habasit.se

Switzerland

Habasit Schweiz, Reinach
Phone: +41 61 715 15 75
www.habasit.ch

Taiwan

Habasit Rossi (Taiwan) Ltd.
Taipei Hsien
Phone: +886 2 2267 0538
www.habasit.com.tw

Turkey

Habasit Kayis San. Ve Tic. Ltd. Sti.
Yenibosna - Bahcelievler - Istanbul
Phone: +90-212-654 94 04
www.habasit.it

Ukraine

Habasit Ukraina, Vinnica
Phone: +38 0432 58 47 35
www.habasit.ua

United Kingdom and Ireland

Habasit Rossi (UK) Ltd., Silsden
Phone: + 44 870 835 9555
www.habasitrossi.co.uk

USA

Habasit America
Suwanee, Georgia
Phone: +1 800-458-6431
www.habasitamerica.com

Habasit America (Habasit ABT)
Seamless Belts
Middletown, Connecticut
Phone: +1 800 632 2211
www.seamlessbelts.com

ROSSI GEARMOTORS

a partner of Habasit, is one of Europe's largest industry groups for the production and sale of gear reducers, gearmotors, inverters, standard and brakemotors.

Rossi Motoriduttori

Via Emilia Ovest 915/A
41100 Modena – Italy
Phone: +39 59 33 02 88
www.rossi-group.com
info@rossi-group.com

Product liability, application considerations

If the proper selection and application of Habasit products are not recommended by an authorized Habasit sales specialist, the selection and application of Habasit products, including the related area of product safety, are the responsibility of the customer.

All indications/information are recommendations and believed to be reliable, but no representations, guarantees, or warranties of any kind are made as to their accuracy or suitability for particular applications. The data provided herein are based on laboratory work with small-scale test equipment, running at standard conditions, and do not necessarily match product performance in industrial use.

New knowledge and experiences can lead to modifications and changes within a short time without prior notice. BECAUSE CONDITIONS OF USE ARE OUTSIDE OF HABASIT'S AND ITS AFFILIATED COMPANIES CONTROL, WE CANNOT ASSUME ANY LIABILITY CONCERNING THE SUITABILITY AND PROCESS ABILITY OF THE PRODUCTS MENTIONED HEREIN. THIS ALSO APPLIES TO PROCESS RESULTS / OUTPUT / MANUFACTURING GOODS AS WELL AS TO POSSIBLE DEFECTS, DAMAGES, CONSEQUENTIAL DAMAGES, AND FURTHER-REACHING CONSEQUENCES.

Headquarters

Habasit AG
Römerstrasse 1
CH-4153 Reinach, Switzerland
Phone +41 61 715 15 15
Fax +41 61 715 15 55
E-mail info@habasit.com
www.habasit.com

Registered trademarks
Copyright Habasit AG
Subject to alterations
Printed in Switzerland
Publication data:
4097BRO.VPR-en0408ITA